

81106 TN

- Popular item



Cylindrical roller thrust bearings

Bearing data, Design considerations

[Tolerances,](#)

table, table, values,



[Design considerations,](#)

table

Bearing interfaces

[Seat tolerances for standard conditions](#)

Technical specification

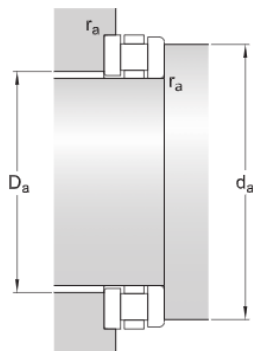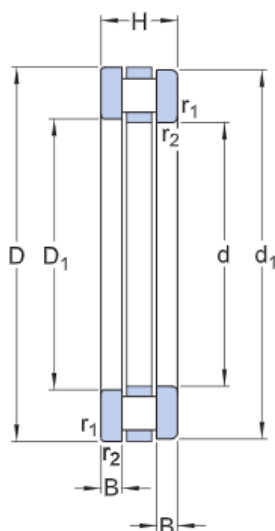

DIMENSIONS

d	30 mm	Bore diameter
D	47 mm	Outside diameter
H	11 mm	Nominal height
d ₁	47 mm	Outside diameter shaft washer
D ₁	32 mm	Bore diameter housing washer
B	3 mm	Height shaft washer
r _{1,2}	min.0.6 mm	Chamfer dimension housing washer

ABUTMENT DIMENSIONS

da	min.46 mm	Abutment diameter shaft
Da	max.31 mm	Abutment diameter housing
ra	max.0.6 mm	Fillet radius

CALCULATION DATA

Basic dynamic load rating	C	27 kN
Basic static load rating	C ₀	78 kN
Fatigue load limit	P _u	7.65 kN
Reference speed		3 000 r/min
Limiting speed		6 000 r/min
Minimum axial load factor	A	0

MASS

Mass bearing	0.057 kg
--------------	----------

INCLUDED PRODUCTS

Roller and cage thrust assembly	K 81106 TN
Shaft washer	WS 81106
Housing washer	GS 81106