

81108 TN

- Popular item



Cylindrical roller thrust bearings

Bearing data, Design considerations

[Tolerances,](#)

table, table, values,



[Design considerations,](#)

table

Bearing interfaces

[Seat tolerances for standard conditions](#)

Technical specification

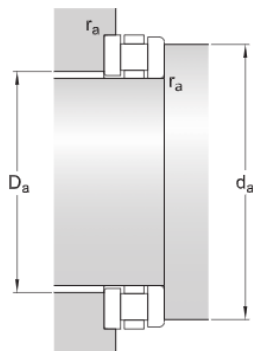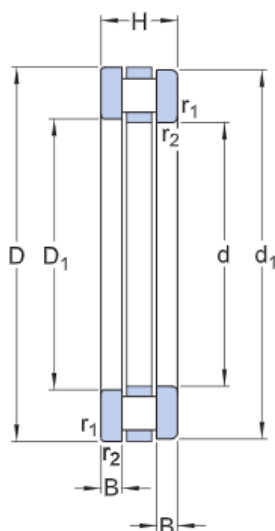

DIMENSIONS

d	40 mm	Bore diameter
D	60 mm	Outside diameter
H	13 mm	Nominal height
d ₁	60 mm	Outside diameter shaft washer
D ₁	42 mm	Bore diameter housing washer
B	3.5 mm	Height shaft washer
r _{1,2}	min.0.6 mm	Chamfer dimension housing washer

ABUTMENT DIMENSIONS

da	min.58 mm	Abutment diameter shaft
Da	max.42 mm	Abutment diameter housing
ra	max.0.6 mm	Fillet radius

CALCULATION DATA

Basic dynamic load rating	C	43 kN
Basic static load rating	C ₀	137 kN
Fatigue load limit	P _u	13.7 kN
Reference speed		2 400 r/min
Limiting speed		5 000 r/min
Minimum axial load factor	A	0.002

MASS

Mass bearing	0.11 kg
--------------	---------

INCLUDED PRODUCTS

Roller and cage thrust assembly	K 81108 TN
Shaft washer	WS 81108
Housing washer	GS 81108