

81110 TN

- Popular item



Cylindrical roller thrust bearings

Bearing data, Design considerations

[Tolerances,](#)

table, table, values,



[Design considerations,](#)

table

Bearing interfaces

[Seat tolerances for standard conditions](#)

Technical specification

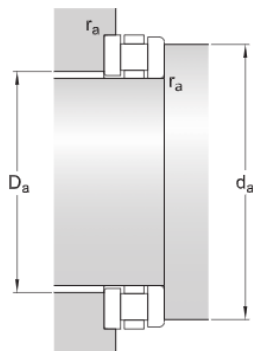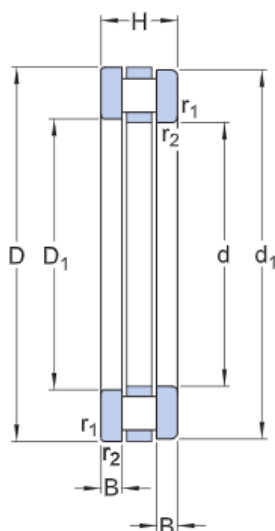

DIMENSIONS

d	50 mm	Bore diameter
D	70 mm	Outside diameter
H	14 mm	Nominal height
d ₁	70 mm	Outside diameter shaft washer
D ₁	52 mm	Bore diameter housing washer
B	4 mm	Height shaft washer
r _{1,2}	min.0.6 mm	Chamfer dimension housing washer

ABUTMENT DIMENSIONS

da	min.68 mm	Abutment diameter shaft
Da	max.52 mm	Abutment diameter housing
ra	max.0.6 mm	Fillet radius

CALCULATION DATA

Basic dynamic load rating	C	47.5 kN
Basic static load rating	C ₀	166 kN
Fatigue load limit	P _u	16.6 kN
Reference speed		2 200 r/min
Limiting speed		4 300 r/min
Minimum axial load factor	A	0.002

MASS

Mass bearing	0.14 kg
--------------	---------

INCLUDED PRODUCTS

Roller and cage thrust assembly	K 81110 TN
Shaft washer	WS 81110
Housing washer	GS 81110