



53209 Thrust ball bearings, single direction

- Popular item

Thrust ball bearings, single direction



Bearing data

[Tolerances,](#)
table 1

Bearing interfaces

[Seat tolerances for standard](#)
[conditions,](#)
[Tolerances and resultant fit](#)


Technical specification

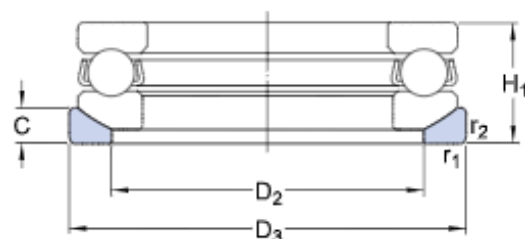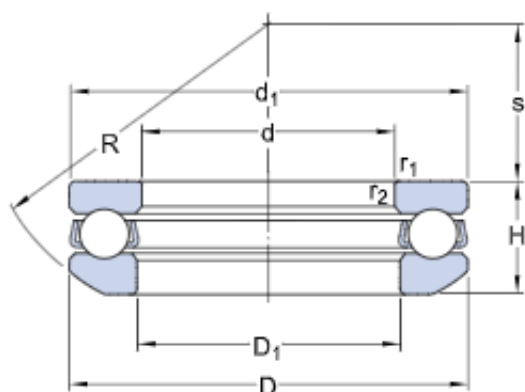

DIMENSIONS

d	45 mm	Bore diameter
D	73 mm	Outside diameter
H	21.3 mm	Height
H ₁	24 mm	Height bearing including seat washer
d ₁	≈ 73 mm	Outside diameter shaft washer
D ₁	≈ 47 mm	Inner diameter housing washer
D ₂	60 mm	Inner diameter sphered seat washer
D ₃	78 mm	Outside diameter sphered housing washer
C	7.5 mm	Height sphered housing washer
R	56 mm	Radius sphered housing washer
s	26 mm	Centre height housing washer sphere
r _{1,2}	min. 1 mm	Chamfer dimension washer

ABUTMENT DIMENSIONS

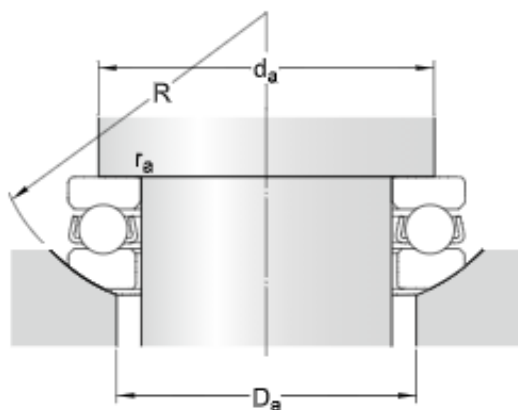

d_a min. 62 mm	Abutment diameter shaft
D_a max. 60 mm	Abutment diameter housing
r_a max. 1 mm	Fillet radius



CALCULATION DATA

C	39 kN	Basic dynamic load rating
C_0	86.5 kN	Basic static load rating
P_u	3.2 kN	Fatigue load limit
	3 400 r/min	Reference speed
	4 800 r/min	Limiting speed
A	0.038	Minimum load factor

MASS

0.39 kg	Mass bearing (including seat washer where applicable)
---------	---

ASSOCIATED PRODUCTS