



3200 A-2ZTN9/MT33 Angular contact ball bearings, double row

- Popular item

Angular contact ball bearings, double row

Bearing data

[Tolerances,](#)

Normal, P6, P5,

[Internal clearance,](#)


table, drawing no

Bearing interfaces

[Seat tolerances for standard conditions,](#)

[Tolerances and resultant fit](#)

Technical specification

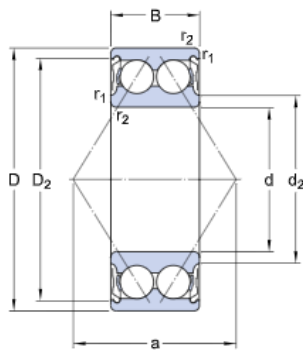


DIMENSIONS

d	10 mm	Bore diameter
D	30 mm	Outside diameter
B	14 mm	Width
d ₂	≈ 15.8 mm	Recess diameter inner ring shoulder
D ₂	≈ 24.95 mm	Recess diameter outer ring shoulder
r _{1,2}	min. 0.6 mm	Chamfer dimension inner ring
a	16 mm	Distance pressure point(s)

ABUTMENT DIMENSIONS

d _e	min. 14.4 mm	Abutment diameter shaft
d _e	max. 15.5 mm	Abutment diameter shaft
D _i	max. 25.6 mm	Abutment diameter housing
r _a	max. 0.6 mm	Fillet radius



CALCULATION DATA

C	7.61 kN	Basic dynamic load rating
C ₀	4.3 kN	Basic static load rating
P _u	0.183 kN	Fatigue load limit
	26 000 r/min	Reference speed
	24 000 r/min	Limiting speed
k _r	0.06	Calculation factor
e	0.8	Calculation factor
X	0.63	Calculation factor
Y ₀	0.66	Calculation factor
Y ₁	0.78	Calculation factor
Y ₂	1.24	Calculation factor

MASS

0.051 kg	Mass bearing
----------	--------------