



# 7244 BCBM Angular contact ball bearings, single row

## Angular contact ball bearings, single row

### Bearing data

[Tolerances,](#)

Normal (metric), P6, P5, Normal (inch),

[Internal clearance,](#)

CA+CB+CC, G,

[Preload,](#)

GA+GB+GC


### Bearing interfaces

[Seat tolerances for standard conditions,](#)

[Tolerances and resultant fit](#)

## Technical specification


### DIMENSIONS



d	220 mm	Bore diameter
D	400 mm	Outside diameter
B	65 mm	Width
d <sub>1</sub>	≈ 291.1 mm	Shoulder diameter inner ring (large side face)
d <sub>2</sub>	≈ 259.1 mm	Shoulder diameter inner ring (small side face)
D <sub>1</sub>	≈ 333.55 mm	Shoulder diameter outer ring (large side face)
a	164 mm	Distance pressure point
r <sub>1,2</sub>	min. 4 mm	Chamfer dimension
r <sub>3,4</sub>	min. 1.5 mm	Chamfer dimension outer ring small side face

### ABUTMENT DIMENSIONS

d <sub>a</sub> min. 237 mm	Abutment diameter shaft
D <sub>c</sub> max. 383 mm	Abutment diameter housing
D <sub>f</sub> max. 391 mm	Abutment diameter housing
r <sub>a</sub> max. 3 mm	Fillet radius
r <sub>b</sub> max. 1.5 mm	Fillet radius

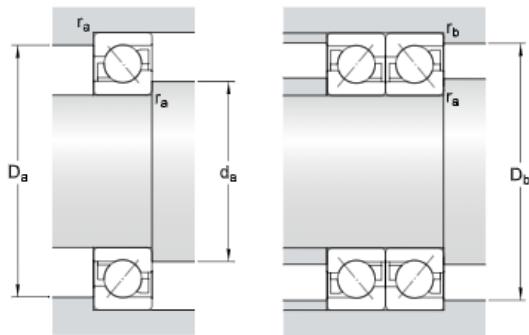

## CALCULATION DATA

C	390 kN	Basic dynamic load rating
$C_0$	560 kN	Basic static load rating
$P_u$	13.4 kN	Fatigue load limit
	1 800 r/min	Reference speed
	2 200 r/min	Limiting speed
A	5.13	Calculation factor
$k_T$	0.08	Calculation factor
e	1.14	Calculation factor

## SINGLE BEARING OR BEARING PAIR ARRANGED IN TANDEM

X	0.35	Calculation factor
$Y_0$	0.26	Calculation factor
$Y_2$	0.57	Calculation factor

## BEARING PAIR ARRANGED BACK-TO-BACK OR FACE-TO-FACE

X	0.57	Calculation factor
$Y_0$	0.52	Calculation factor
$Y_1$	0.55	Calculation factor
$Y_2$	0.93	Calculation factor