



7306 BEGBP Angular contact ball bearings, single row

- Popular item

- SKF Explorer

Angular contact ball bearings, single row

Bearing data

[Tolerances,](#)

Normal (metric), P6, P5, Normal (inch),

[Internal clearance,](#)

CA+CB+CC, G,

[Preload,](#)


GA+GB+GC

Bearing interfaces

[Seat tolerances for standard conditions,](#)

[Tolerances and resultant fit](#)

Technical specification




DIMENSIONS

d	30 mm	Bore diameter
D	72 mm	Outside diameter
B	19 mm	Width
d1	≈ 46.5 mm	Shoulder diameter inner ring (large side face)
d2	≈ 37.9 mm	Shoulder diameter inner ring (small side face)
D1	≈ 56.6 mm	Shoulder diameter outer ring (large side face)
a	31 mm	Distance pressure point
r _{1,2}	min. 1.1 mm	Chamfer dimension
r _{3,4}	min. 0.6 mm	Chamfer dimension outer ring small side face

ABUTMENT DIMENSIONS

d _e min. 37 mm	Abutment diameter shaft
D _i max. 65 mm	Abutment diameter housing
D _j max. 67.8 mm	Abutment diameter housing
r _a max. 1 mm	Fillet radius
r _b max. 0.6 mm	Fillet radius

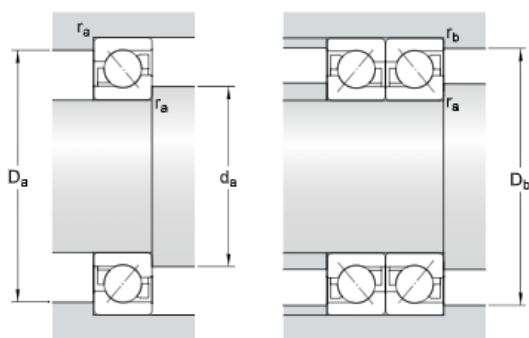

CALCULATION DATA

C	35.5 kN	Basic dynamic load rating
C ₀	21.2 kN	Basic static load rating
P _u	0.9 kN	Fatigue load limit
	12 000 r/min	Reference speed
	13 000 r/min	Limiting speed
A	0.007	Calculation factor
k _r	0.1	Calculation factor
e	1.14	Calculation factor

SINGLE BEARING OR BEARING PAIR ARRANGED IN TANDEM

X	0.35	Calculation factor
Y ₀	0.26	Calculation factor
Y ₂	0.57	Calculation factor

BEARING PAIR ARRANGED BACK-TO-BACK OR FACE-TO-FACE

X	0.57	Calculation factor
Y ₀	0.52	Calculation factor
Y ₁	0.55	Calculation factor
Y ₂	0.93	Calculation factor