

## **The Timken Company** 4500 Mt Pleasant St. NW N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: <u>CustomerCAD@timken.com</u> • Web site: <u>www.timken.com</u>

Part Number 6002-NR-C3, Deep Groove Ball Bearings (6000, 6200, 6300, 6400)

Timken's deep groove ball bearings deliver reliable performance in a wide range of applications and conditions. With super-finished raceways and controlled geometries, our premium design helps ensure consistent quality.



## <u>Specifications</u> | <u>Dimensions</u> | <u>Basic Load Ratings</u> | <u>Factors</u>

Specifications –				
	Clearance	C3		
	Bore Size d	15.000 mm		
	Features	Snap Ring		
	Bearing Type	Standard DGBB		
	Weight	0.030 Kg		

Dimensions		-
Outside Diameter D	32.000 mm	
utside Ring Width B	9.000 mm	




Radius Rs min	0.300 mm
Snap Ring Diameter D2 max	36.700 mm
Snap Ring Width f max	1.120 mm

Ba	sic Load Ratings				-
	Cr - Dynamic Load Rating	5.6 kN			
	COr - Static Load Rating	2.8 kN			

Grease Reference Speed 20000 rpm	Fac	tors		-
0:1 Defending Control 200000		Grease Reference Speed	20000 rpm	
Oil Reference Speed 30000 rpm		Oil Reference Speed	30000 rpm	



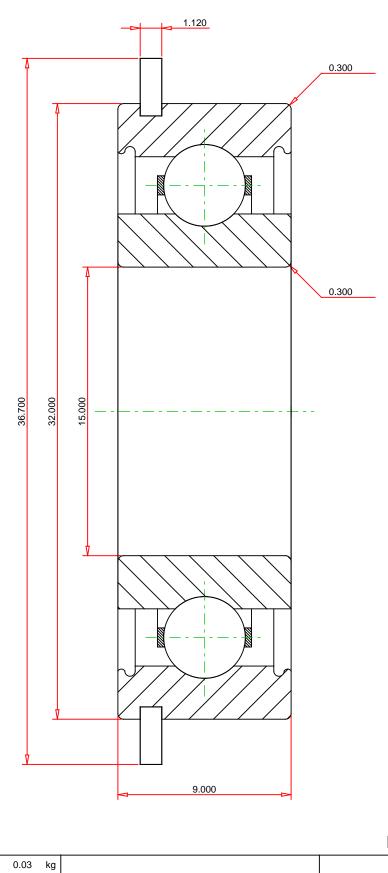

## **METRIC UNITS**

Weight

THE TIMKEN COMPANY NORTH CANTON, OHIO USA

6002-NR-C3

Deep Groove Ball Bearings (6000, 6200, 6300, 6400)

Dynamic Load Rating Static Load Rating

5600 2800 Ν

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY