

The Timken Company 4500 Mt Pleasant St. NW N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: <u>CustomerCAD@timken.com</u> • Web site: <u>www.timken.com</u>

Part Number 6020-2RZ-C3, Deep Groove Ball Bearings (6000, 6200, 6300, 6400)

Timken's deep groove ball bearings deliver reliable performance in a wide range of applications and conditions. With super-finished raceways and controlled geometries, our premium design helps ensure consistent quality.



<u>Specifications</u> | <u>Dimensions</u> | <u>Basic Load Ratings</u> | <u>Factors</u>

Specifications –		
	Clearance	C3
	Bore Size d	100.000 mm
	Features	Non-Contact Seals
	Bearing Type	Standard DGBB
	Weight	1.25 Kg

Dimen	nsions		-
0	Outside Diameter D	150.000 mm	
(T)	utside Ring Width B	24.000 mm	




Radius Rs min	1.500 mm
---------------	----------

Cr - Dynamic Load Rating 60.2 kN C0r - Static Load Rating 54.2 kN	Bas	sic Load Ratings			-
COr - Static Load Rating 54.2 kN		Cr - Dynamic Load Rating	60.2 kN		
		C0r - Static Load Rating	54.2 kN		

Fac	ctors		-
	Grease Reference Speed	4800 rpm	
	Oil Reference Speed	6900 rpm	



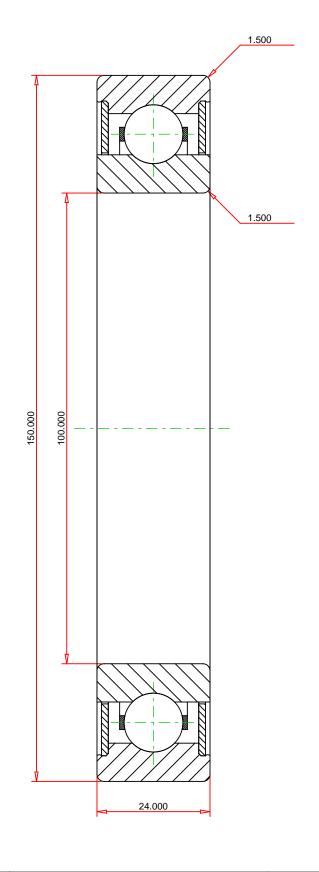

METRIC UNITS

Weight 0.02 kg

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

6020-2RZ-C3

Deep Groove Ball Bearings (6000, 6200, 6300, 6400)

Dynamic Load Rating Static Load Rating 4600 2000

no l

FOR DISCUSSION ONLY

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.