



**The Timken Company**

4500 Mt Pleasant St. NW

N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: [CustomerCAD@timken.com](mailto:CustomerCAD@timken.com) • Web site: [www.timken.com](http://www.timken.com)

## Part Number 6303-Z-NR-C3, Deep Groove Ball Bearings (6000, 6200, 6300, 6400)

Timken's deep groove ball bearings deliver reliable performance in a wide range of applications and conditions. With super-finished raceways and controlled geometries, our premium design helps ensure consistent quality.



[Specifications](#) | [Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

### Specifications

Clearance	C3
Bore Size d	17.000 mm
Features	One Shield With Snap Ring
Bearing Type	Standard DGBB
Weight	0.120 Kg

### Dimensions

Outside Diameter D	47.000 mm
Outside Ring Width B	14.000 mm




<b>Radius Rs min</b>	1.000 mm
<b>Snap Ring Diameter D2 max</b>	52.700 mm
<b>Snap Ring Width f max</b>	1.120 mm

## Basic Load Ratings

<b>Cr - Dynamic Load Rating</b>	13.6 kN
<b>C0r - Static Load Rating</b>	6.6 kN

## Factors

<b>Grease Reference Speed</b>	15000 rpm
<b>Oil Reference Speed</b>	22000 rpm

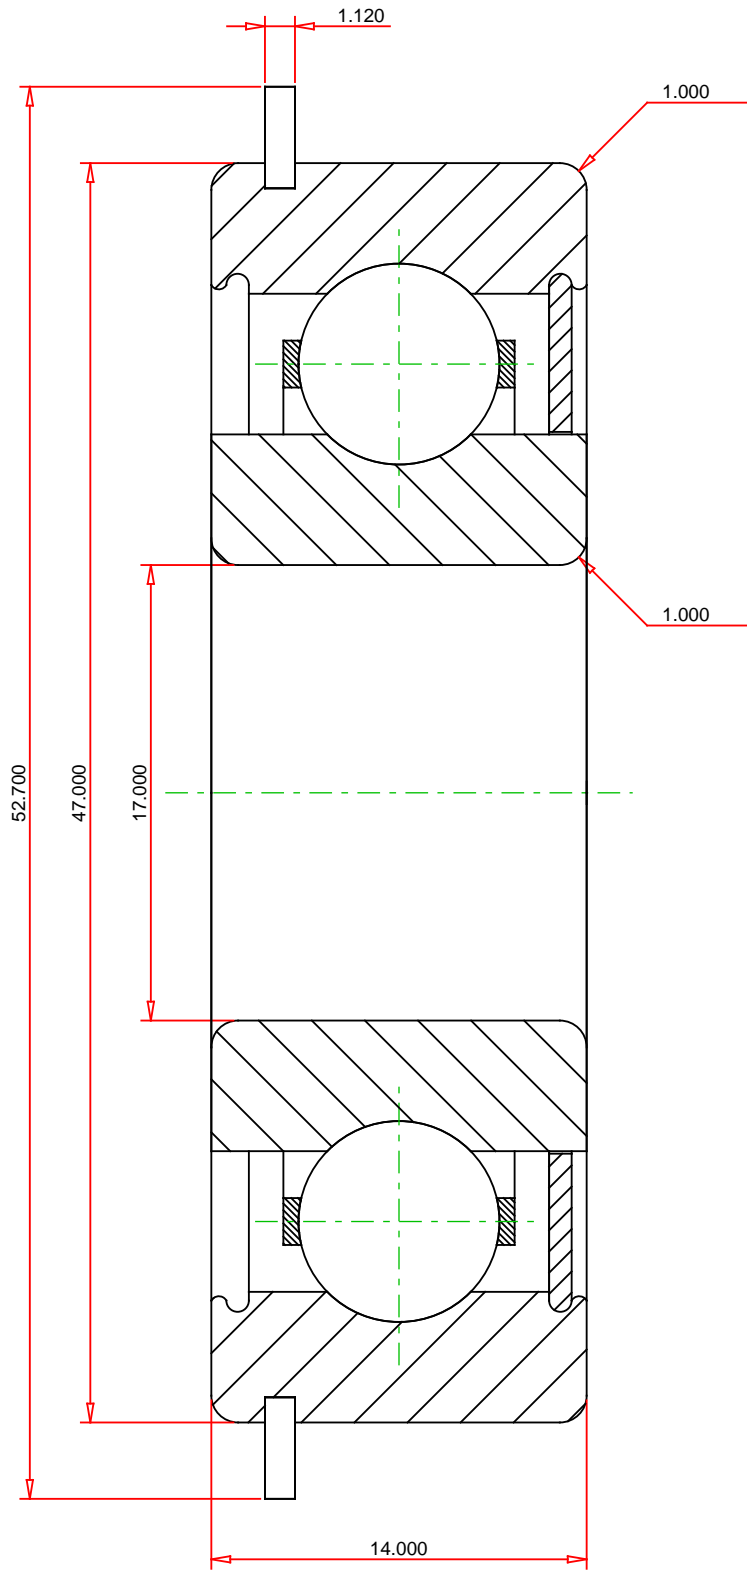

METRIC UNITS

Weight 0.12 kg

**TIMKEN**®

**THE TIMKEN COMPANY**  
NORTH CANTON, OHIO USA

**6303-Z-NR-C3**  
Deep Groove Ball Bearings (6000, 6200, 6300, 6400)

Dynamic Load Rating 13600 N  
Static Load Rating 6600 N

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

**FOR DISCUSSION ONLY**