

The Timken Company 4500 Mt Pleasant St. NW N. Canton, OH 44720


Phone: (234) 262-3000

E-Mail: <u>CustomerCAD@timken.com</u> • Web site: <u>www.timken.com</u>

Part Number 7303 BTN1, Timken® Single Row Angular Contact Ball Bearings (7200, 7300)

Timken® angular contact ball bearings are designed for combination radial and axial loading. Single-row bearings have high thrust capacity in one direction. Some single-row bearings are specifically designed for duplex mounting in sets for maximum performance.





<u>Dimensions</u> | <u>Basic Load Ratings</u> | <u>Factors</u> | <u>Specifications</u> | <u>Abutment and Fillet Dimensions</u>

Dimensions –			
	d - Bore	17.00 mm 0.6693 in	
	D - Outer Diameter	47.00 mm 1.8504 in	
	Bearing Width	14.00 mm 0.5512 in	
	Contact Angle	40 °	

Basic Load Ratings		-
0 - Static Radial Rating	8300 N 1866 lbf	
	14000 N	




C1 ISO - Dynamic Radial Rating 3596 lbf

Fac	tors		-
	Limiting Speed (Grease)	15000 rpm	
	Limiting Speed (Oil)	20000 rpm	

Specifications –		
	Ball Type	STEEL
	Cage Type	Molded
	Cage Material	Polyamide
	Bearing Weight	0.11 Kg 0.243 lb
	Design Units	METRIC
	R - Inner Ring "Touch" Radius	0.6
	r - Outer Ring "Touch" Radius	0.6
	Features	Open

Abutment and Fillet Dimensions –		
	R - Inner Ring "To Clear" Radius ¹	0.60 mm 0.024 in
	r - Outer Ring "To Clear" Radius ²	0.60 mm 0.024 in
	da - Inner Ring Backing Diameter	23.0 mm 0.906 in
	Da - Outer Ring Backing Diameter	41.0 mm 1.614 in



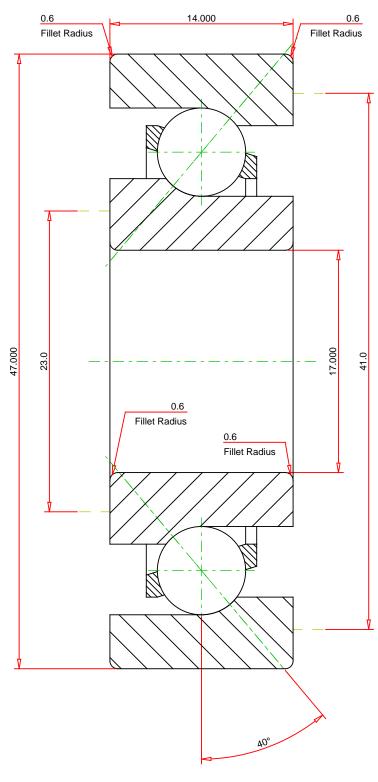

METRIC UNITS

Number of Balls Per Row
Bearing Weight

9
0.110 kg

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

7303 BTN1

Timken® Single Row Angular Contact Ball Bearings (7200, 7300)

Dynamic Radial Rating Static Radial Rating 16000 N 8300 N

t no

FOR DISCUSSION ONLY

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.