



**The Timken Company**

4500 Mt Pleasant St. NW


N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: [CustomerCAD@timken.com](mailto:CustomerCAD@timken.com) • Web site: [www.timken.com](http://www.timken.com)

## Part Number 7303 BTN1/UL, Timken® Single Row Angular Contact Ball Bearings (7200, 7300)

Timken® angular contact ball bearings are designed for combination radial and axial loading. Single-row bearings have high thrust capacity in one direction. Some single-row bearings are specifically designed for duplex mounting in sets for maximum performance.

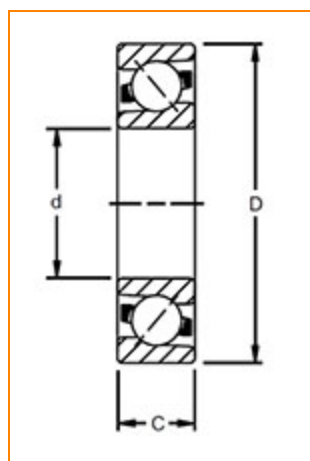

[Dimensions](#) | [Basic Load Ratings](#) | [Factors](#) | [Specifications](#) | [Abutment and Fillet Dimensions](#)

### Dimensions

<b>d - Bore</b>	17.00 mm 0.6693 in
<b>D - Outer Diameter</b>	47.00 mm 1.8504 in
<b>Bearing Width</b>	14.00 mm 0.5512 in
<b>Contact Angle</b>	40 °

### Basic Load Ratings



**C0 - Static Radial Rating**

8300 N  
1866 lbf

<b>C1 ISO - Dynamic Radial Rating</b>	16000 N 3596 lbf
---------------------------------------	---------------------

## Factors

<b>Limiting Speed (Grease)</b>	15000 rpm
--------------------------------	-----------

<b>Limiting Speed (Oil)</b>	20000 rpm
-----------------------------	-----------

## Specifications

<b>Ball Type</b>	STEEL
------------------	-------

<b>Cage Type</b>	Molded
------------------	--------

<b>Cage Material</b>	Polyamide
----------------------	-----------

<b>Bearing Weight</b>	0.11 Kg 0.243 lb
-----------------------	---------------------

<b>Design Units</b>	METRIC
---------------------	--------

<b>R - Inner Ring "Touch" Radius</b>	0.6
--------------------------------------	-----

<b>r - Outer Ring "Touch" Radius</b>	0.6
--------------------------------------	-----

<b>Features</b>	Open
-----------------	------

## Abutment and Fillet Dimensions

<b>R - Inner Ring "To Clear" Radius<sup>1</sup></b>	0.60 mm 0.024 in
---	---------------------

<b>r - Outer Ring "To Clear" Radius<sup>2</sup></b>	0.60 mm 0.024 in
---	---------------------

<b>da - Inner Ring Backing Diameter</b>	23.0 mm 0.906 in
---	---------------------

<b>Da - Outer Ring Backing</b>	41.0 mm
--------------------------------	---------

**Diameter**

1.614 in

- <sup>1</sup> Maximum housing fillet radius that bearing corners will clear.
- <sup>2</sup> Maximum shaft fillet radius that bearing corners will clear.

