

TIMKEN**The Timken Company**


4500 Mt Pleasant St. NW

N. Canton, OH 44720

Phone: (234) 262-3000**E-Mail:** CustomerCAD@timken.com • **Web site:** www.timken.com

Part Number 7304 BM/CN, Timken® Single Row Angular Contact Ball Bearings (7200, 7300)

Timken® angular contact ball bearings are designed for combination radial and axial loading. Single-row bearings have high thrust capacity in one direction. Some single-row bearings are specifically designed for duplex mounting in sets for maximum performance.

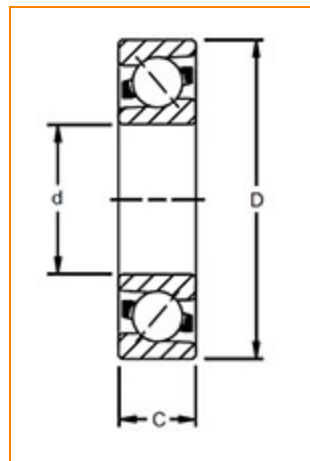

[Dimensions](#) | [Basic Load Ratings](#) | [Factors](#) | [Specifications](#) | [Abutment and Fillet Dimensions](#)

Dimensions

d - Bore	20.00 mm 0.7874 in
D - Outer Diameter	52.00 mm 2.0472 in
Bearing Width	15.00 mm 0.5906 in
Contact Angle	40 °

Basic Load Ratings



C0 - Static Radial Rating

9700 N
2180 lbf

C1 ISO - Dynamic Radial Rating	17300 N 3888 lbf
---------------------------------------	---------------------

Factors

Limiting Speed (Grease)	13000 rpm
Limiting Speed (Oil)	18000 rpm

Specifications

Ball Type	STEEL
Cage Type	Machined
Cage Material	Brass
Bearing Weight	0.16 Kg 0.353 lb
Design Units	METRIC
R - Inner Ring "Touch" Radius	0.6
r - Outer Ring "Touch" Radius	0.6
Features	Open


Abutment and Fillet Dimensions

R - Inner Ring "To Clear" Radius¹	0.60 mm 0.024 in
r - Outer Ring "To Clear" Radius²	0.60 mm 0.024 in
da - Inner Ring Backing Diameter	27.0 mm 1.063 in
Da - Outer Ring Backing	45.00 mm

Diameter

1.7720 in

- ¹ Maximum housing fillet radius that bearing corners will clear.
- ² Maximum shaft fillet radius that bearing corners will clear.

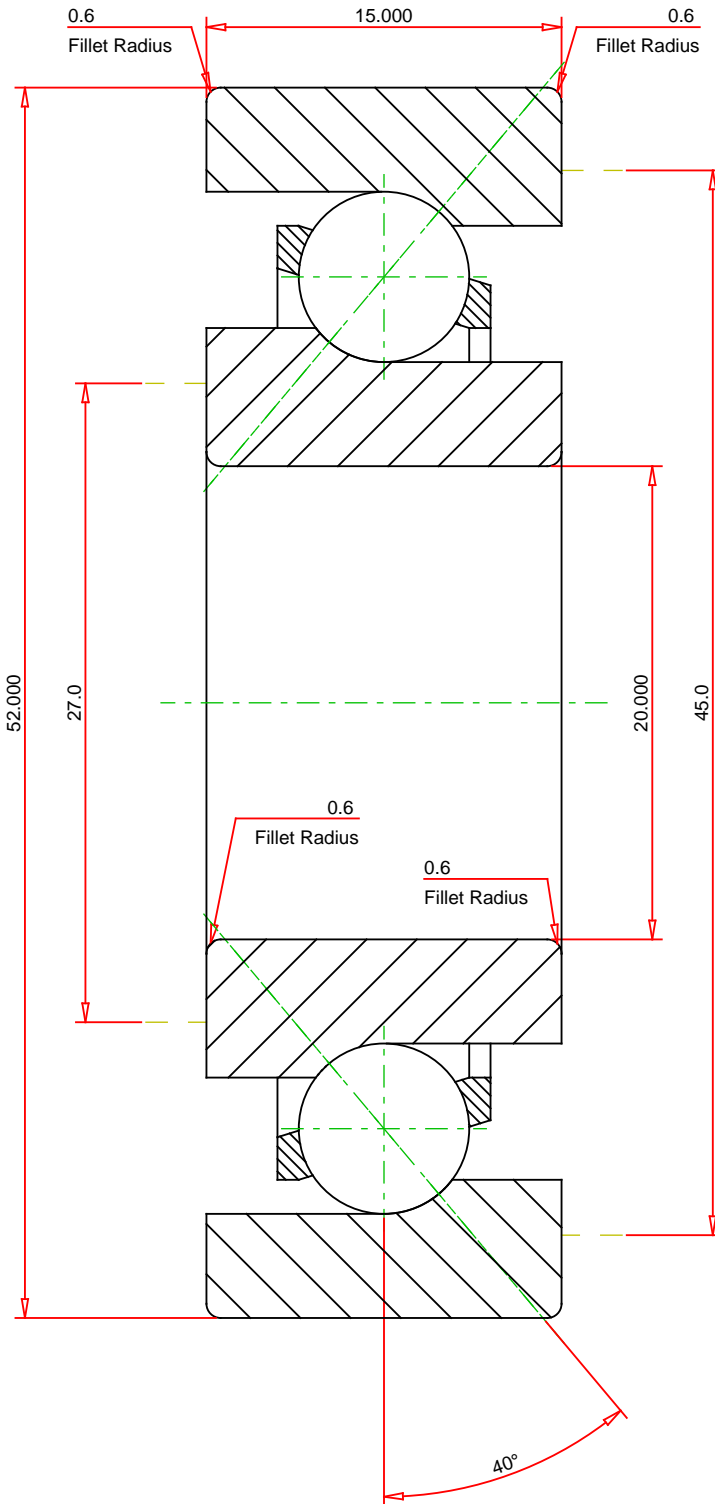

METRIC UNITS

Number of Balls Per Row	10
Bearing Weight	0.160 kg

TIMKEN®

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

7304 BM/CN	
Timken® Single Row Angular Contact Ball Bearings (7200, 7300)	
Dynamic Radial Rating	17300 N
Static Radial Rating	9700 N

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY