



PRE3G


PILOT OPERATED PRESSURE CONTROL VALVE WITH PROPORTIONAL CONTROL AND INTEGRAL ELECTRONICS

SERIES 30

SUBPLATE MOUNTING ISO 4401-03

p max **350** bar
Q max **40** l/min

MOUNTING INTERFACE

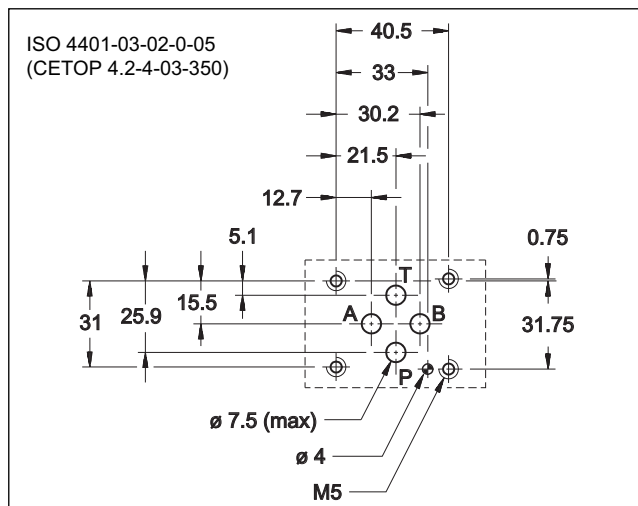


PERFORMANCES

(obtained with mineral oil with viscosity of 36 cSt at 50°C and p = 140 bar)

Maximum operating pressure: - P port - T port	bar	350 2
Minimum controlled pressure	see p min= f(Q) diagram	
Minimum flow Maximum flow (see p max = f(Q) diagram)	l/min	2 40
Step response	see paragraph 6	
Hysteresis	% of p nom	< 3%
Repeatability	% of p nom	< ±1%
Electrical characteristic	see paragraph 2	
Ambient temperature range	°C	-20 / +60
Fluid temperature range	°C	-20 / +80
Fluid viscosity range	cSt	10 ÷ 400
Fluid contamination degree	According to ISO 4406:1999 class 18/16/13	
Recommended viscosity	cSt	25
Mass	kg	3,8

OPERATING PRINCIPLE

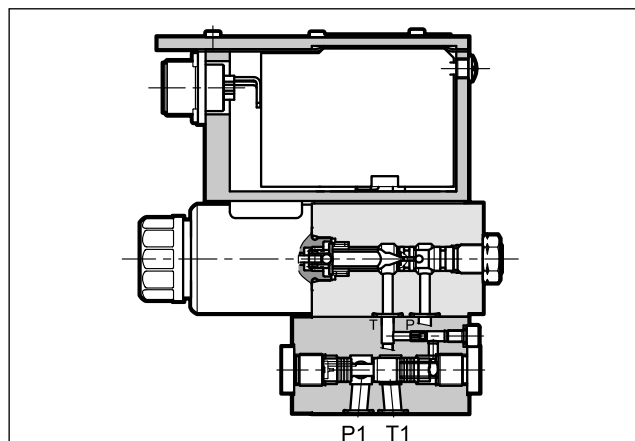


— The PRE3G valve is a pilot operated pressure control valve with electric proportional control and mounting surface in compliance with ISO 4401 standards, controlled by an integral digital amplifier.

— It is suitable to modulate the pressure in hydraulic circuits.


— The valves are available with command signal in voltage or current and on board electronics with internal enable, external enable or 0V monitor on pin C. A solenoid current monitoring signal is available.

— Valves are easy to install. The driver directly manages digital settings.


HYDRAULIC SYMBOL

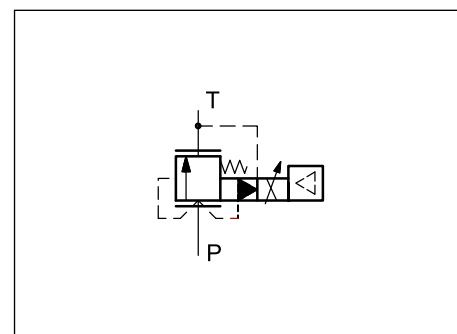

1 - IDENTIFICATION CODE

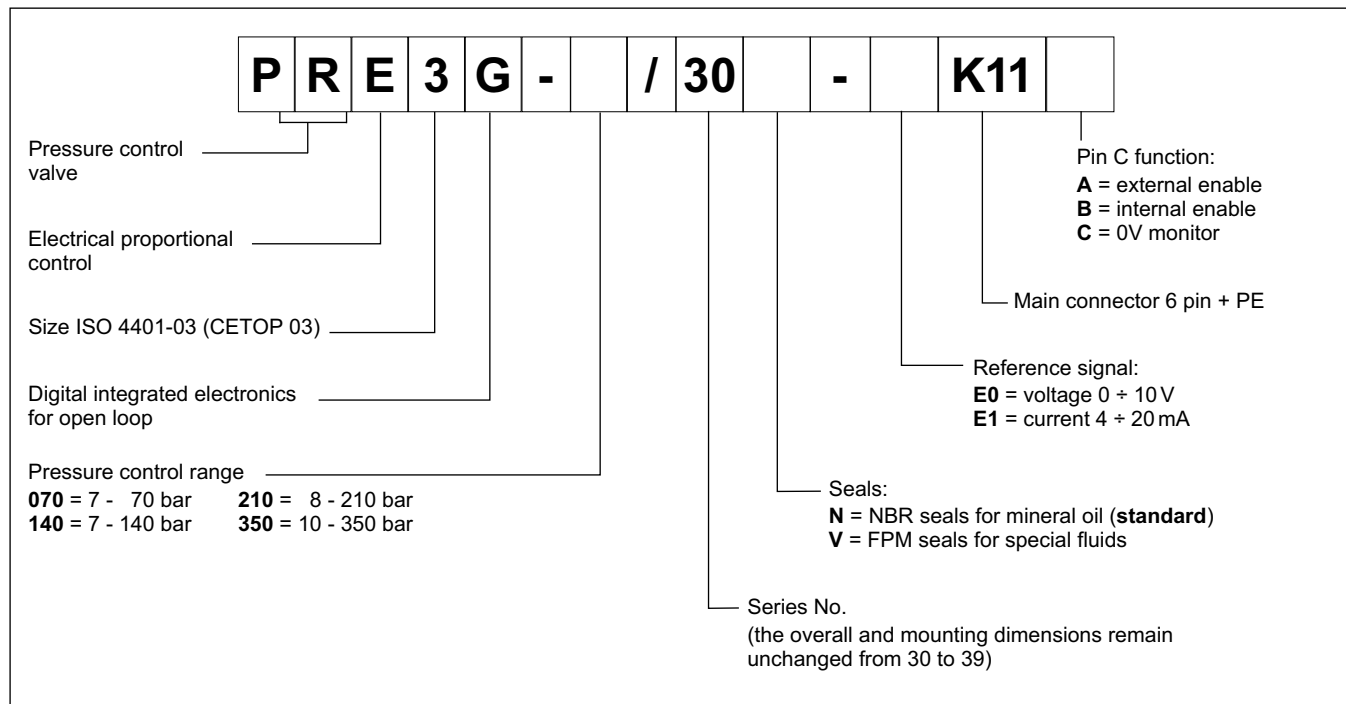

2 - DETAILED SYMBOL

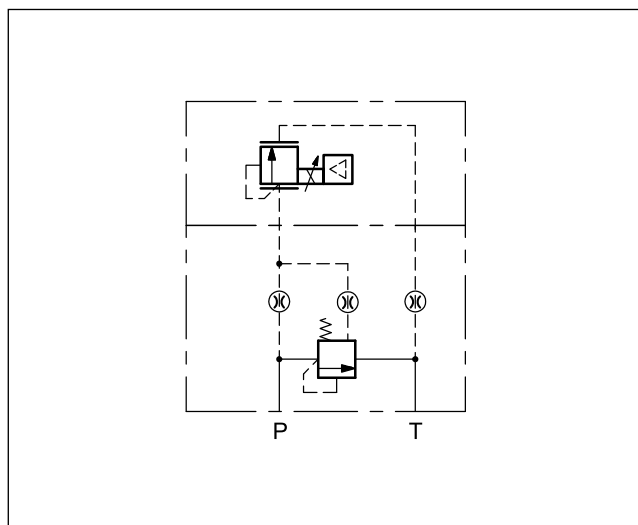


3 - ELECTRICAL CHARACTERISTICS

3.1 - Electrical on board electronics


Duty cycle		100% (continuous operation)
Protection class according to EN 60529		IP65 / IP67
Supply voltage	V DC	24 (from 19 to 30 VDC), ripple max 3 Vpp
Power consumption	VA	25
Maximum solenoid current	A	1.88
Fuse protection, external		2A time lag
Command signals: voltage (E0) current (E1)	V DC mA	0 ÷ 10 (Impedance Ri > 11 kOhm) 4 ÷ 20 (Impedance Ri = 58 Ohm)
Monitor signal (current to solenoid): voltage (E0) current (E1)	V DC mA	0 ÷ 10 (Impedance Ro > 1 kOhm) 4 ÷ 20 (Impedance Ro = 500 Ohm)
Managed breakdowns		Overload and electronics overheating, cable breakdown, supply voltage failures
Communication		LIN-bus Interface (with the optional kit)
Connection		7 - pin MIL-C-5015-G (DIN-EN 175201-804)
Electromagnetic compatibility (EMC) emissions EN 61000-6-4 immunity EN 61000-6-2		According to 2004/108/EC standards

3.2 - On-board electronics diagrams


VERSION A - External Enable

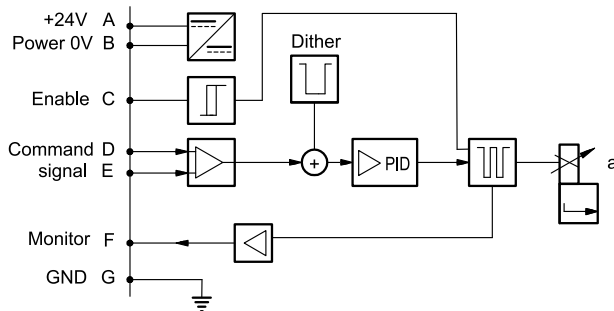

VERSION B - Internal Enable

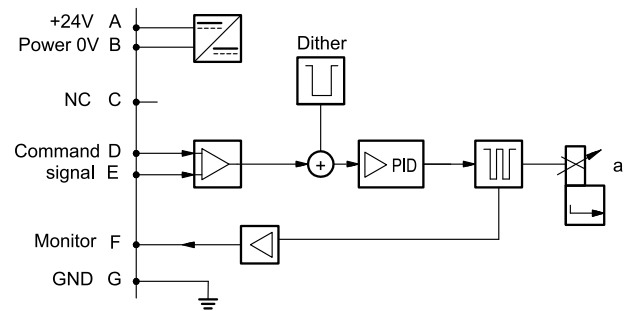


VERSION C - 0V Monitor

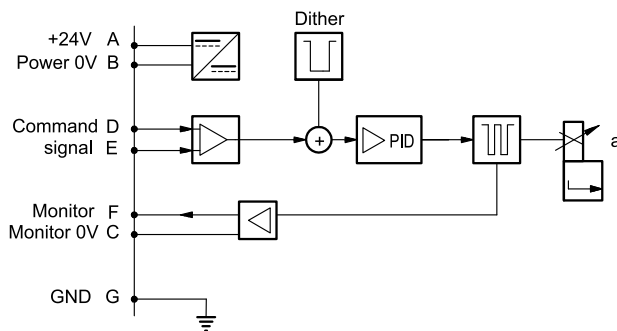

4 - VERSIONS WITH VOLTAGE COMMAND (E0)

The reference signal is between 0 ÷ 10V. The monitor feature of versions B and C becomes available with a delay of 0,5 sec from the power-on of the card.

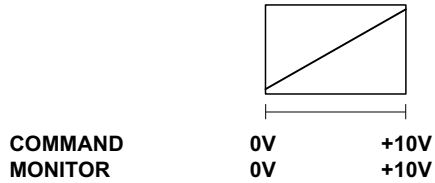


Pin	Values	version A	version B	version C
A	24 V DC	Supply Voltage		
B	0 V			
C		Enable 24 V DC	not used -	PIN F reference 0 V
D	± 10 V	Command (differential input)		
E	0 V	PIN D reference		
F	± 10 V	Monitor (0V reference: pin B)		Monitor
PE	GND	Ground (Earth)		

5 - VERSIONS WITH CURRENT COMMAND (E1)

The reference signal is supplied in current 4 ÷ 20 mA. If the current for command is lower the card shows a breakdown cable error. To reset the error is sufficient to restore the signal.

The monitor feature of versions B and C becomes available with a delay of 0,5 sec from the power-on of the card.

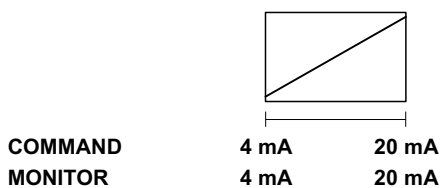

Pin	Values	version A	version B	version C
A	24 V DC	Supply Voltage		
B	0 V			
C		Enable 24 V DC	not used -	PIN F reference 0 V
D	4 ÷ 20 mA	Command		
E	0 V	PIN D reference		
F	4 ÷ 20 mA	Monitor (0V reference: pin B)		Monitor
PE	GND	Ground (Earth)		



6 - CHARACTERISTIC CURVES

(measured with viscosity of 36 cSt at 50°C)


Typical control curves according to the current supplied to the solenoid for pressure control ranges: 070, 140, 210, 350, measured with input flow rate $Q = 10$ l/min.

The curves are obtained without any hysteresis and linearity compensation and they are measured without any backpressure in T. The full scale pressure is set in factory with a flow rate of 10 l/min. In case of higher flow rate, the full scale pressure will increase considerably (see diagram $p_{max} = f(Q)$).


PRESSURE CONTROL $p = f(I)$

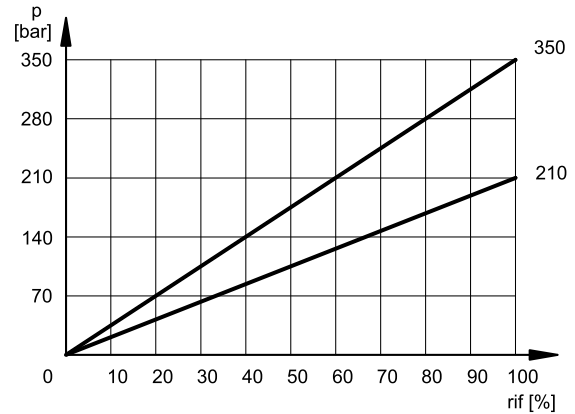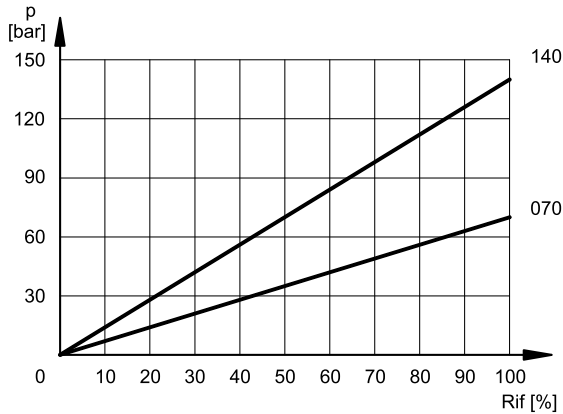

MINIMUM CONTROLLED PRESSURE $p_{min} = f(Q)$

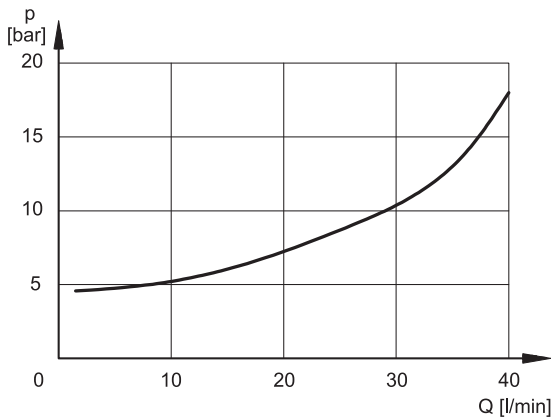


PRESSURE VARIATION $p_{max} = f(Q)$

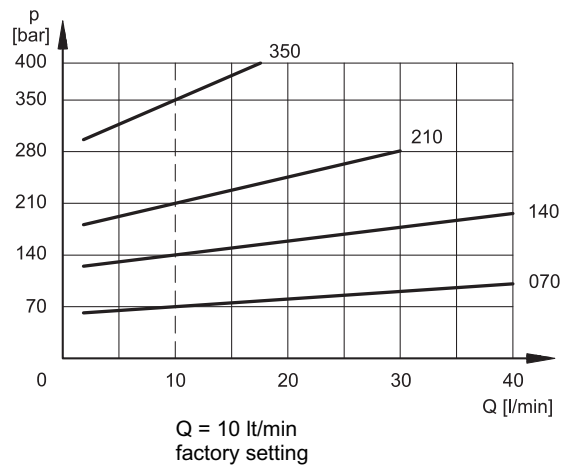

7 - RESPONSE TIMES


(obtained with mineral oil with viscosity of 36 cSt at 50°C)

Response times are obtained by using a PRE3G-210, with an input flow rate of 10 l/min and a pressure oil volume of 0,5 litres. The response time is affected both by the flow rate and the oil volume in the pipework.

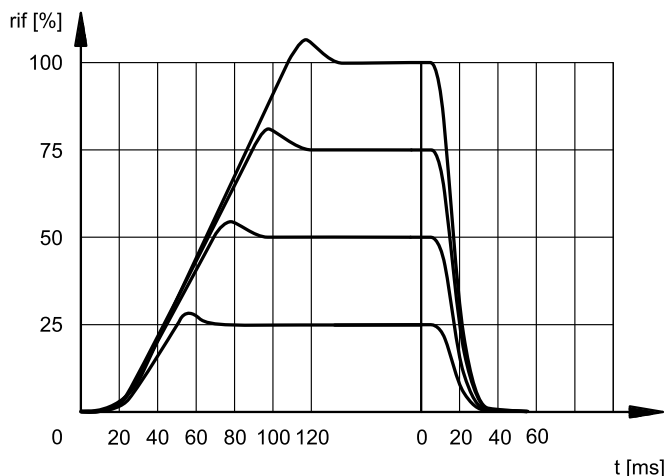

8 - OVERALL AND MOUNTING DIMENSIONS

dimensions in mm

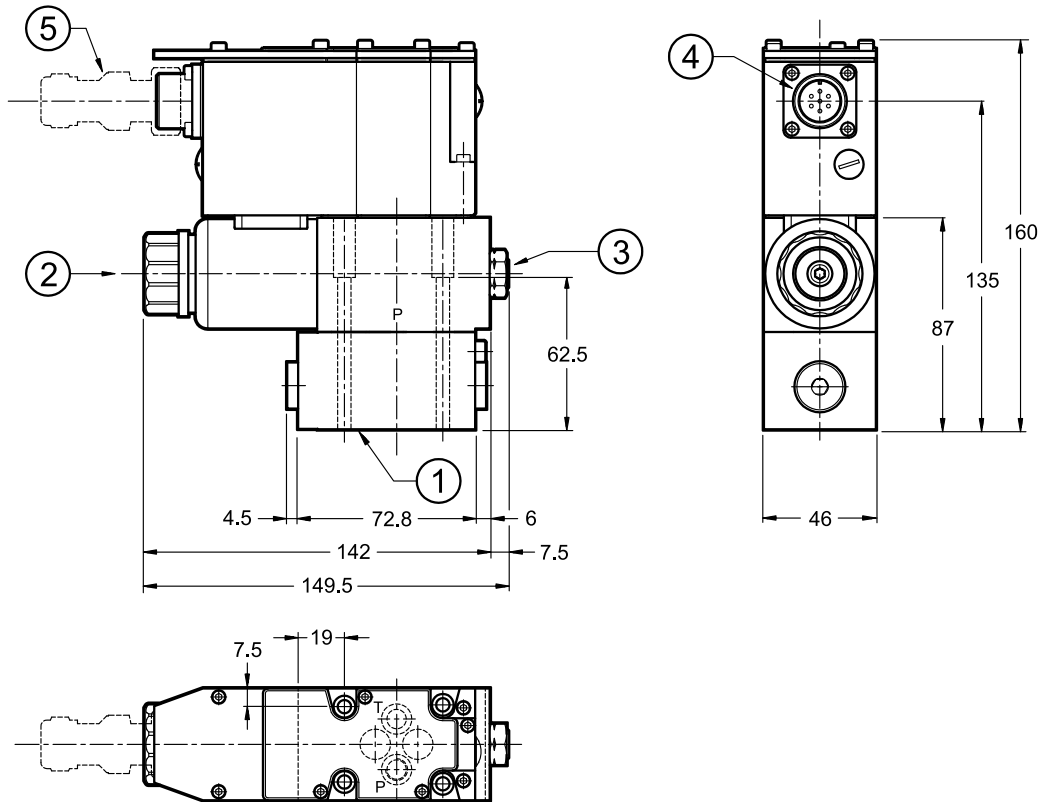

Fastenings bolts: 4 SHC screws M5x70 - ISO 4762
Tightening torque: 5 Nm

NOTE: at the first start up, or after a long period of no use, it is necessary to vent the air through the breather (3) placed at the end of the solenoid tube.

1	Mounting surface with sealing rings: 4 OR type 2037 - 90 shore (9.25 x 1.78)
2	Breather: Allen key 4
3	Factory sealing setting (we recommend not unscrewing the nut)
4	Main connection
5	Mating electrical connector to be ordered separately. See at section 10

9 - HYDRAULIC FLUIDS

Use mineral oil-based hydraulic fluids HL or HM type, according to ISO 6743-4. For these fluids, use NBR seals. For fluids HFDR type (phosphate esters) use FPM seals (code V). For the use of other kinds of fluid such as HFA, HFB, HFC, please consult our technical department.

Using fluids at temperatures higher than 80 °C causes a faster degradation of the fluid and of the seals characteristics.

The fluid must be preserved in its physical and chemical characteristics.

10 - INSTALLATION

We recommend to install the valves either in horizontal position, or vertical position with the solenoid downward. If the valve is installed in vertical position and with the solenoid upward, you must consider possible variations of the minimum controlled pressure, if compared to what is indicated in paragraph 6.


Ensure that there is no air in the hydraulic circuit. In particular applications, can be necessary to vent the air entrapped in the solenoid tube, by using the appropriate drain screw in the solenoid tube.

Ensure the solenoid tube is always filled with oil. At the end of the operation, make sure of having correctly replaced the drain screw.

Connect the valve T port directly to the tank. Add any backpressure value detected in the T line to the controlled pressure value.

Maximum admissible backpressure in the T line, under operational conditions, is 2 bar.

Valves are fixed by means of screws or tie rods on a flat surface with planarity and roughness equal to or better than those indicated in the relative symbols. If minimum values are not observed, fluid can easily leak between the valve and support surface.

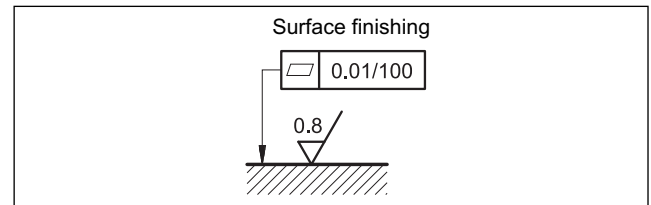

11 - ACCESSORIES

(to be ordered separately)

11.1 Mating connector

These valves have a plug for 7-pin mating connector, that is placed on the box of the integral motion control.




So as to avoid electromagnetic troubles and comply with the electromagnetic compatibility regulation EMC, it is recommended the use of a metal connector.

If a plastic connector is used, make sure that the protection characteristics IP and EMC of the valve are guaranteed.

Duplomatic offers a metal cable connector type MIL-C-5015-G (EN 175201-804).

name: **EX7S/L/10** code **3890000003**

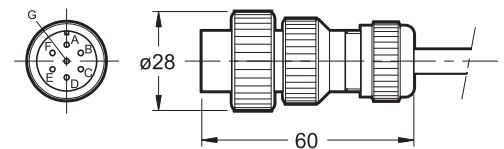

11.2 - Connection cables size

Power supply:

- up to 20 m cable length : 1,0 mm²
- up to 40 m cable length : 1,5 mm²

Signal: 0,50 mm²

A suitable cable would have 7 isolated conductors, a separate screen for the signal wires and an overall screen.

11.3 - Kit for start-up LINPC-USB

Device for service start-up and diagnostic, see catalogue 89850.

12 - SUBPLATES

(see catalogue 51 000)

PMMD-AI3G with ports on rear
PMMD-AL3G with side ports
Ports dimensions P, T, A, B: 3/8" BSP thread



DUPLOMATIC OLEODINAMICA S.p.A.
20015 PARABIAGO (MI) • Via M. Re Depaolini 24
Tel. +39 0331.895.111
Fax +39 0331.895.339

www.duplomatic.com • e-mail: sales.exp@duplomatic.com