





ENGINEERING INFORMATION

TYPE 4082A			CAPACITY										
			m ³ /h	750	715	680	640	600	550	500	455	400	350
KW	30	OUTLET 8 in	l/s	208	199	189	178	167	153	139	126	111	97.3
HP 40			HEIGHT										
R.P.M	980	weight 750 kg	m	6	7	8	9	10	11	12	13	14	15

TYPE 4082B			CAPACITY										
			m ³ /h	500	480	460	430	400	375	340	305	260	
KW	30	OUTLET 8 in	l/s	139	133	128	120	111	104	95	85	72.3	
HP 40			HEIGHT										
R.P.M	980	weight 750 kg	m	14.5	15	15.5	16	16.5	17	17.5	18	18.5	

TYPE 4082C			CAPACITY										
			m ³ /h	400	380	360	340	310	285	255	215	180	105
KW	30	OUTLET 8 in	l/s	111	106	100	95	86	79	71	60	50	29.2
HP 40			HEIGHT										
R.P.M	980	weight 750 kg	m	18	18.5	19	19.5	20	20.5	21	21.5	22	23

IP68 - CLASS F - 380/660 V (Y/Δ) - 60A - 50HZ

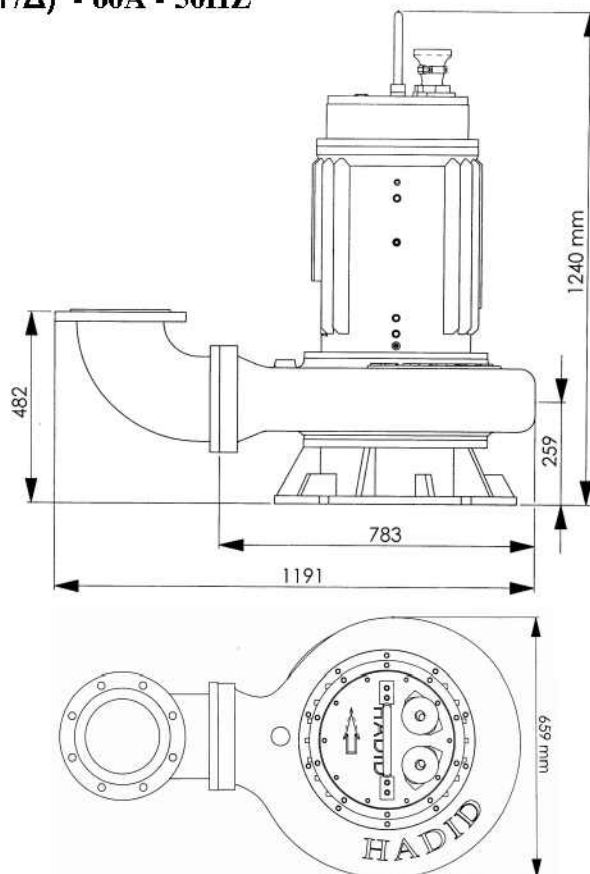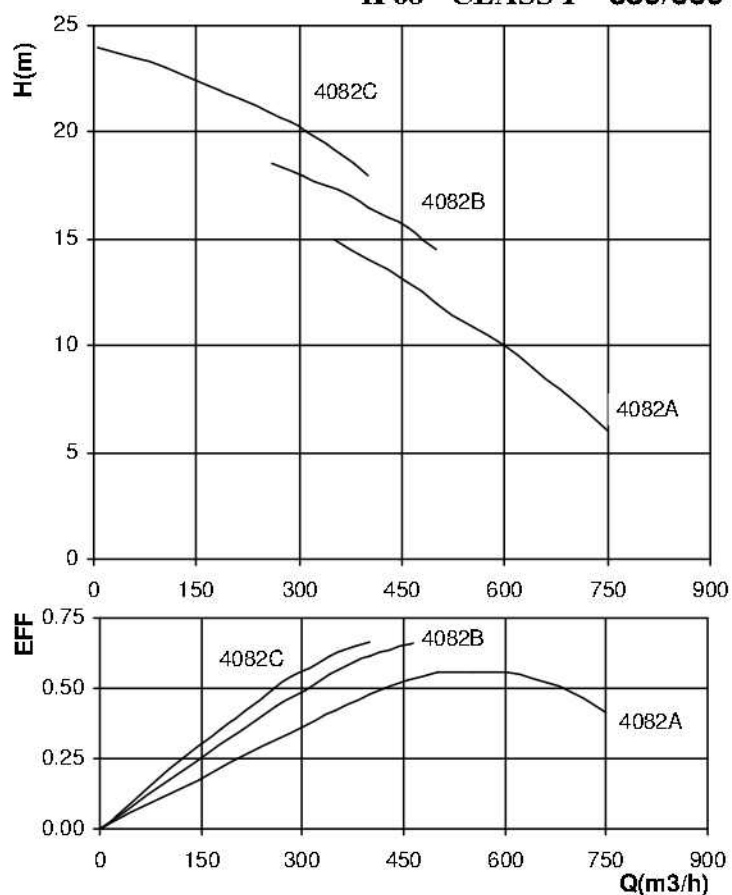



ENGINEERING INFORMATION

TYPE 4082D			CAPACITY											
			m3/h	360	300	275	250	235	200	170	140	110	80	5
KW 30	OUTLET 8 in	l/s	100	83.4	76.5	69.5	62.6	55.6	47.3	38.9	30.6	22.2	1.4	
HP 40	PIPE DN 200	HEIGHT												
R.P.M 980	weight 750 kg	m	20	21.5	22	22.5	23	23.5	24	24.5	25	25.5	26.5	

TYPE 4082E		CAPACITY											
		m3/h	290	260	230	200	170	140	110	80	50	20	10
KW 30	OUTLET 8 in	l/s	80.6	72.3	63.9	55.6	47.3	38.9	30.6	22.2	13.9	5.6	2.8
HP 40	PIPE DN 200	HEIGHT											
R.P.M 980	weight 750 kg	m	23	23.5	24	24.5	25	25.5	26	26.5	27	27.5	27.8

IP68 - CLASS F - 380/660 V (Y/Δ) - 60A - 50HZ

