


LVS/LVR
Stainless Steel Vertical
Multistage Pump



Ambient Temperature

Max. ambient temperature: + 40°C. Ambient temperature above 40°C or installation at altitude of more than 1000 meters above sea level require the use of an oversize motor. Because of low air density and poor cooling effects, the motor output power P2 will be decreased. See the picture.

In such cases, it may be necessary to use a motor with a higher output power rating.

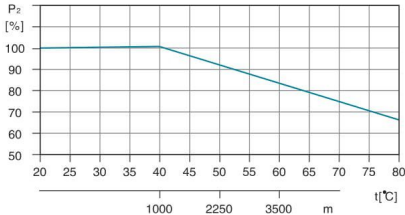

For example, when the pump is installed at altitude of more than 3500 meters above sea level, P2 will be decreased to 88%. When the ambient temperature is 70°C, P2 will be decreased to 78%.

Application

- Suitable for transferring liquids of low viscosity, non-inflammable and non-explosive, not containing solid particles or fibers
- Water supply & drainage for high-rise buildings, filtration and transfer at waterworks, pressure boosting in main pipe
- Washing and cleaning systems, boiler feeding, cooling water circulation, water treatment systems, auxiliary system, support equipment
- Ultra-filtration systems, reverse-osmosis systems, distillation systems, separators, swimming pools
- Agricultural irrigation: sprinkler irrigation, drip-feed irrigation
- Food & beverage industry
- Fire-fighting system


Operating Conditions

- Low viscosity, non-inflammable and non-explosive liquids not containing solid particles or fibers. The liquids must not chemically attack the pump materials. When pumping liquids with a density or viscosity is higher than that of water, a motor with a higher output power rating shall be used.
- Liquid temperature: -20°C~+120°C
- Flow ranges: 0.7-240 m³/h
- Liquid pH value: 4 - 10
- Max. ambient temperature: +40°C
- Max. operation pressure: 33 bar
- Altitude: up to 1000 m

Motor

- IE 2 motor (IE 3 motor optional)
- Totally enclosed & fan-cooled
- Protection class: IP55
- Standard voltage: 50Hz 1 × 220V/3 × 380V

Identification Codes

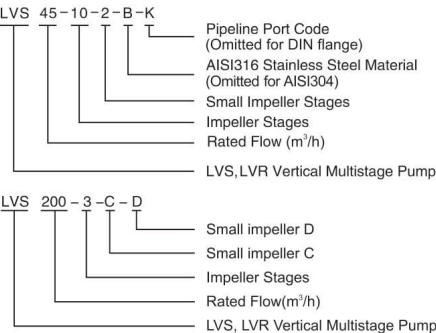

LVS: Stainless steel wetted parts
LVR: Cast iron base & pump cover

Identifications codes of flange structure
A: Oval flange; K: Clamp connector ;
G: Threaded connector


Minimum Inlet Pressure-Npsh

Calculation of the inlet pressure "H" is recommended in these situations:
The liquid temperature is high.
The flow is significantly higher than the rated flow.
Water is drawn from depths.
Water is drawn through long pipes.
Inlet conditions are poor.

To avoid cavitation, make sure that there is a minimum pressure on the suction side of the pump. The maximum suction lift "H" in meters head can be calculated as follows:

H	=	$P_b \times 10.2 - NPSH - H_f - H_v - H_s$
P_b	=	Barometric pressure in bar. (Barometric pressure can be set to 1 bar). In closed systems, P_b indicates the system pressure in bar.
NPSH	=	Net Positive Suction Head in meters head. (To be read from the NPSH curve at the highest flow the pump will be delivering.)
H_f	=	Friction loss in suction pipe in meters head. (At the highest flow the pump will be delivering.)
H_v	=	Vapor pressure in meters head. (To be read from the vapor pressure scale. "Hv" depends on the liquid temperature "tm")
H_s	=	Safety margin=minimum 0.5 meters head.

If the "H" calculated is positive, the pump can operate at a suction lift of maximum "H" meters head.
If the "H" calculated is negative, an inlet pressure of minimum "H" meters head is required.

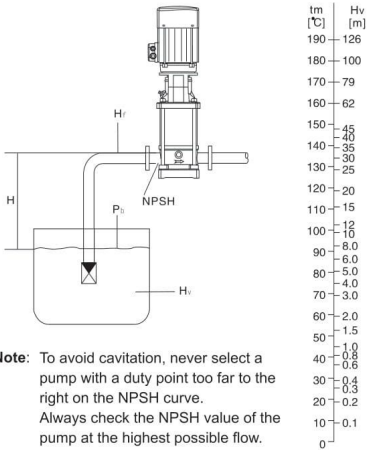


Note: To avoid cavitation, never select a pump with a duty point too far to the right on the NPSH curve.
Always check the NPSH value of the pump at the highest possible flow.

Maximum Inlet Pressure

The following table shows the maximum permissible inlet pressure. However, the current inlet pressure + the pressure against a closed valve must always be lower than the Max. permissible operating pressure.
If the maximum permissible operating pressure is exceeded, the bearing in the motor may be damaged and the life of the shaft seal reduced.

Model	Maximum Inlet Pressure [bar]
LVR1, LVS1	
1-2 — 1-36	10
LVR2, LVS2	
2-2 — 2-12	6
2-3 — 2-12	10
2-13 — 2-26	15
LVR3, LVS3	
3-2 — 3-29	10
3-31 — 3-26	15
LVR4, LVS4	
4-2 — 4-11	6
4-3 — 4-11	10
4-12 — 4-22	15
LVR5, LVS5	
5-2 — 5-16	10
5-18 — 5-29	15
LVR10, LVS10	
10-1 — 10-6	8
10-7 — 10-22	10
LVR15, LVS15	
15-1 — 15-3	8
15-4 — 15-17	10
LVR20, LVS20	
20-1 — 20-3	8
20-4 — 20-17	10
LVR32, LVS32	
32-1-1 — 32-4	4
32-5-2 — 32-10	10
32-11 — 32-14	15
LVR45, LVS45	
45-1-1 — 45-2	4
45-3-2 — 45-5	10
45-6-2 — 45-13-2	15
LVR64, LVS64	
64-1-1 — 64-2-2	4
64-2-1 — 64-4-2	10
64-4-1 — 64-8-1	15
LVR90, LVS90	
90-1-1 — 90-1	4
90-2-2 — 90-3-2	10
90-3 — 90-6	15
LVR120, LVS120	
120-1 — 120-2-1	10
120-2 — 120-5-1	15
120-5 — 120-7	20
LVR150, LVS150	
150-1-1 — 150-2-2	10
150-2-1 — 150-4-1	15
150-4 — 150-6	20
LVR200, LVS200	
200-1-D — 200-1-C	10
200-1-C — 200-2-2C	15
200-2-C — 200-4	20

How to Read The Curve Charts

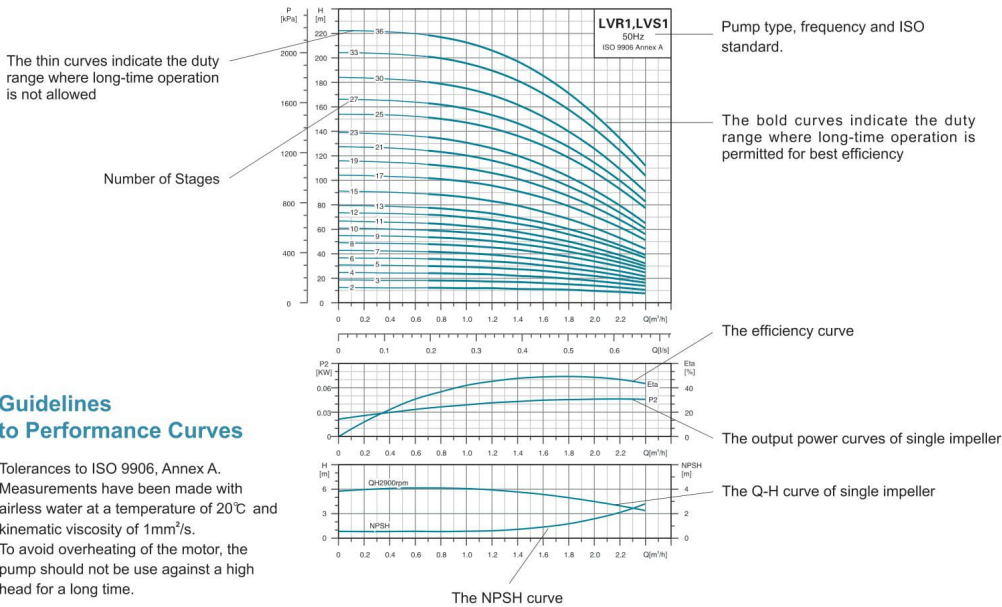


Guidelines to Performance Curves

Tolerances to ISO 9906, Annex A.
Measurements have been made with
airless water at a temperature of 20°C and
kinematic viscosity of 1mm²/s.
To avoid overheating of the motor, the
pump should not be used against a high
head for a long time.

Minimum Flow Rate


Due to the risk of overheating, the pump should not be used
at a flow below the minimum flow rate. The curve below
shows the minimum flow rate as a percentage of the nominal
flow rate in relation to the liquid temperature.

Air cooling apparatus

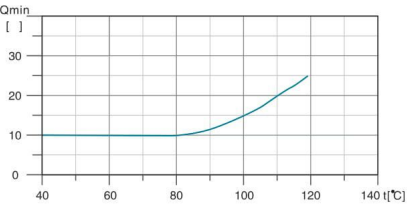

Note: The outlet valve must be opened when the pump is
in operation.


Terminal Box Positions
(Note: set to position 1 before delivery)

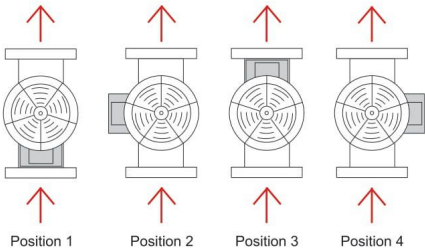


Product Range

MODEL	LVR(S)1	LVR(S)2	LVR(S)3	LVR(S)4	LVR(S)5	LVR(S)10	LVR(S)15	LVR(S)20	LVR(S)32	LVR(S)45	LVR(S)64	LVR(S)90	LVR(S)120	LVR(S)150	LVR(S)200
DESCRIPTION	LVR(S)1	LVR(S)2	LVR(S)3	LVR(S)4	LVR(S)5	LVR(S)10	LVR(S)15	LVR(S)20	LVR(S)32	LVR(S)45	LVR(S)64	LVR(S)90	LVR(S)120	LVR(S)150	LVR(S)200
Rated flow [m³/h]	1	2	3	4	5	10	15	20	32	45	64	90	120	150	200
Flow range [m³/h]	0.7-2.4	1.0-3.5	1.2-4.5	1.5-8	2.5-8.5	5-13	8-23	10.5-29	15-40	22-58	30-85	45-120	60-150	80-180	100-240
Max. pressure [bar]	22	23	24	21	24	22	23	25	28	33	22	20	16	16	16
Motor power [kW]	0.37-2.2	0.37-3	0.37-3	0.37-4	0.37-4	1.1-7.5	1.1-15	1.1-18.5	1.5-30	3-45	4-45	5.5-45	11-75	11-75	18.5-110
Temperature Range [°C]	-20°C~+120°C (Note: Both the Max. permissible pressure and liquid temperature range refer to the pump capacity.)														
Max. pump efficiency [%]	45	46	55	59	60	65	70	72	78	79	80	81	74	73	79
Pipe connection-LVR															
Oval flange	G1	G1	G1	G1 1/4	G1 1/4	-	-	-	-	-	-	-	-	-	-
DIN flange	DN25	DN25	DN25	DN32	DN32	DN40	DN50	DN50	DN65	DN80	DN100	DN100	DN125	DN125	DN150
Pipe connection-LVS															
Oval flange	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
DIN flange	DN32	DN32	DN32	DN32	DN32	DN40	DN50	DN50	DN65	DN80	DN100	DN100	DN125	DN125	DN150
Clamp connector	φ 42	φ 42	φ 42	φ 42	φ 42	-	-	-	-	-	-	-	-	-	-
Threaded connector	G1 1/4	G1 1/4	G1 1/4	G1 1/4	G1 1/4	-	-	-	-	-	-	-	-	-	-

Scope of Performance-LVR,LVS

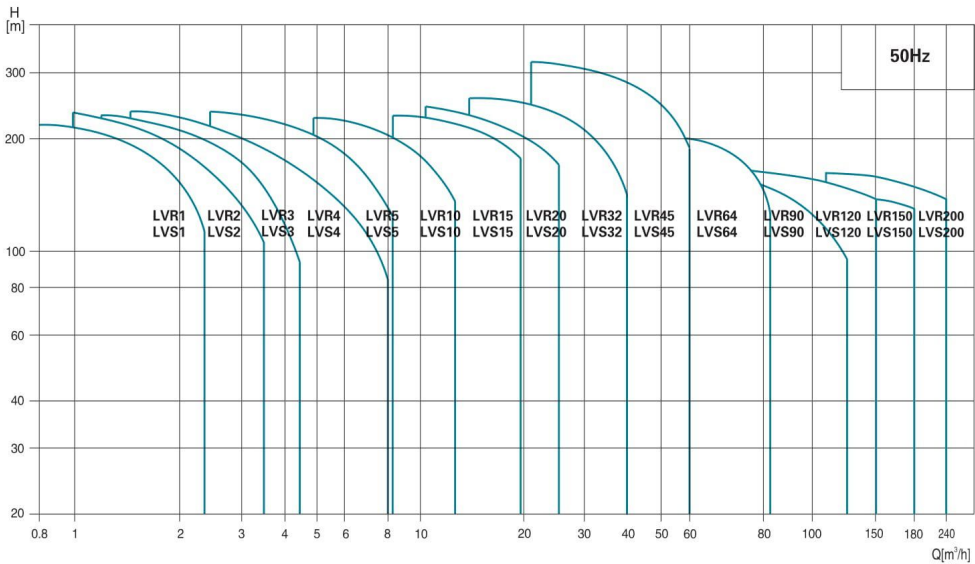


Cross Section




MODEL: LVR1 (2.3.4.5)

Part	Material
1 Base	HT200
2 Drainage plug assembly	AIISI304
3 Primary diffuser	AIISI304
4 Diffuser with bearing	AIISI304
5 Medium diffuser	AIISI304
6 Impeller	AIISI304
7 Final volute	AIISI304
8 Motor base	HT200
9 Filling plug	AIISI304
10 Coupling	Iron based powder metallurgy
11 Motor	
12 Guarding plate	AIISI304
13 Cartridge seal	
14 Vent plug assembly	AIISI304
15 Pump shaft	AIISI304
16 Pump barrel	AIISI304
17 Oval flange	HT200




MODEL: LVS1 (2.3.4.5)

Part	Material	Optional Material
1 Base plate	HT200	
2 Drainage plug assembly	AIISI304	AIISI316
3 Chassis	ZG304	ZG316
4 Primary diffuser	AIISI304	AIISI316
5 Diffuser with bearing	AIISI304	AIISI316
6 Medium diffuser	AIISI304	AIISI316
7 Impeller	AIISI304	AIISI316
8 Final volute	AIISI304	AIISI316
9 Motor base	HT200	
10 Filling plug	AIISI304	AIISI316
11 Coupling	Iron based powder metallurgy	
12 Motor		
13 Guarding plate	AIISI304	
14 Cartridge seal		
15 Pump cover	ZG304	ZG316
16 Vent plug assembly	AIISI304	AIISI316
17 Pump shaft	AIISI304	AIISI316
18 Pump barrel	AIISI304	AIISI316
19 Flange	ZG35	




MODEL: LVR32 (45.64.90)

Part	Material
1 Base plate	HT200
2 Flange	ZG35
3 Primary diffuser	AIISI304
4 Medium diffuser	AIISI304
5 Diffuser with bearing	AIISI304
6 Impeller	AIISI304
7 Shaft sleeve assembly	
8 Final diffuser	AIISI304
9 Vent plug assembly	AIISI304
10 Motor base	HT200
11 Motor	
12 Guarding plate	AIISI304
13 Coupling	QT400
14 Cartridge seal	
15 HT200 Pump head	HT200
16 Filling plug	AIISI304
17 Tension plate	AIISI304
18 Pump barrel	AIISI304
19 Pump shaft	AIISI304




MODEL: LVS32 (45.64.90)

Part	Material	Optional Material
1 Base plate	HT200	
2 Flange	ZG35	
3 Chassis	ZG304	ZG316
4 Primary diffuser	AIISI304	AIISI316
5 Medium diffuser	AIISI304	AIISI316
6 Diffuser with bearing	AIISI304	AIISI316
7 Impeller	AIISI304	AIISI316
8 Shaft sleeve assembly		
9 Final diffuser	AIISI304	AIISI316
10 Vent plug assembly	AIISI304	AIISI316
11 Motor base	HT200	
12 Motor		
13 Guarding plate	AIISI304	
14 Coupling	QT400	
15 Cartridge seal		
16 Pump head	ZG304	ZG316
17 Filling plug	AIISI304	AIISI316
18 Tension plate	AIISI304	AIISI316
19 Pump barrel	AIISI304	AIISI316
20 Pump shaft	AIISI304	AIISI316




MODEL: LVR10 (15.20)

Part	Material
1 Base	HT200
2 Drainage plug assembly	AIISI304
3 Primary diffuser	AIISI304
4 Diffuser with bearing	AIISI304
5 Medium diffuser	AIISI304
6 Impeller	AIISI304
7 Final volute	AIISI304
8 Filling plug	AIISI304
9 Motor base	HT200
10 Coupling	Iron based powder metallurgy
11 Motor	
12 Guarding plate	AIISI304
13 Cartridge seal	
14 Vent plug assembly	AIISI304
15 Pump shaft	AIISI304
16 Pump barrel	AIISI304




MODEL: LVS10 (15.20)

Part	Material	Optional Material
1 Base plate	HT200	
2 Drainage plug assembly	AIISI304	AIISI316
3 Chassis	ZG304	ZG316
4 Primary diffuser	AIISI304	AIISI316
5 Diffuser with bearing	AIISI304	AIISI316
6 Medium diffuser	AIISI304	AIISI316
7 Impeller	AIISI304	AIISI316
8 Final volute	AIISI304	AIISI316
9 Filling plug	AIISI304	AIISI316
10 Motor base	HT200	
11 Coupling	Iron based powder metallurgy	
12 Motor		
13 Guarding plate	AIISI304	
14 Cartridge seal		
15 Vent plug assembly	AIISI304	AIISI316
16 Pump cover	ZG304	AIISI316
17 Pump shaft	AIISI304	AIISI316
18 Pump barrel	AIISI304	AIISI316
19 Flange	ZG35	



MODEL: LVR120 (150.200)



Part	Material
1 Base plate	HT200
2 Flange	ZG35
3 Base	HT200
4 Primary diffuser	AIISI304
5 Medium diffuser	AIISI304
6 Diffuser with bearing	AIISI304
7 Impeller	AIISI304
8 Final diffuser	AIISI304
9 Pump head	HT200
10 Motor base	HT200
11 Motor	
12 Coupling	QT400
13 Guarding plate	AIISI304
14 Cartridge seal	
15 Filling plug	AIISI304
16 Tension plate	AIISI304
17 Pump barrel	AIISI304
18 Pump shaft	AIISI304




MODEL: LVS120 (150.200)

Part	Material	Optional Material
1 Base plate	HT200	
2 Flange	ZG35	
3 Chassis	ZG304	ZG316
4 Primary diffuser	AIISI304	AIISI316
5 Medium diffuser	AIISI304	AIISI316
6 Diffuser with bearing	AIISI304	AIISI316
7 Impeller	AIISI304	AIISI316
8 Final diffuser	AIISI304	AIISI316
9 Pump head	ZG304	ZG316
10 Motor base	HT200	
11 Motor		
12 Coupling	QT400	
13 Guarding plate	AIISI304	
14 Cartridge seal		
15 Filling plug	AIISI304	AIISI316
16 Tension plate	AIISI304	AIISI316
17 Pump barrel	AIISI304	AIISI316
18 Pump shaft	AIISI304	AIISI316

Hydraulic Performance Curves

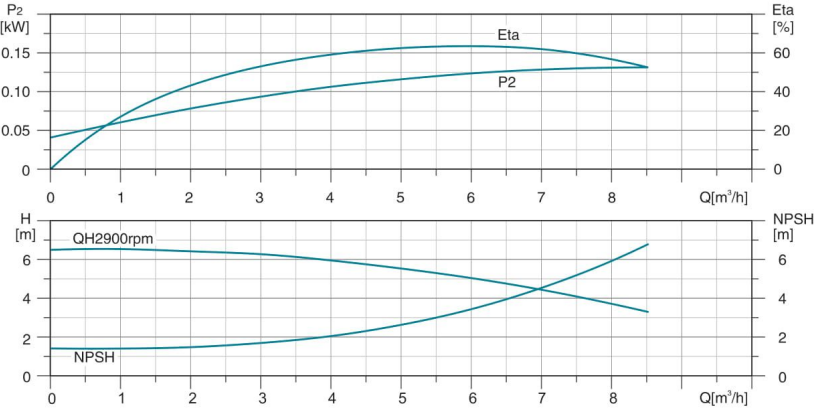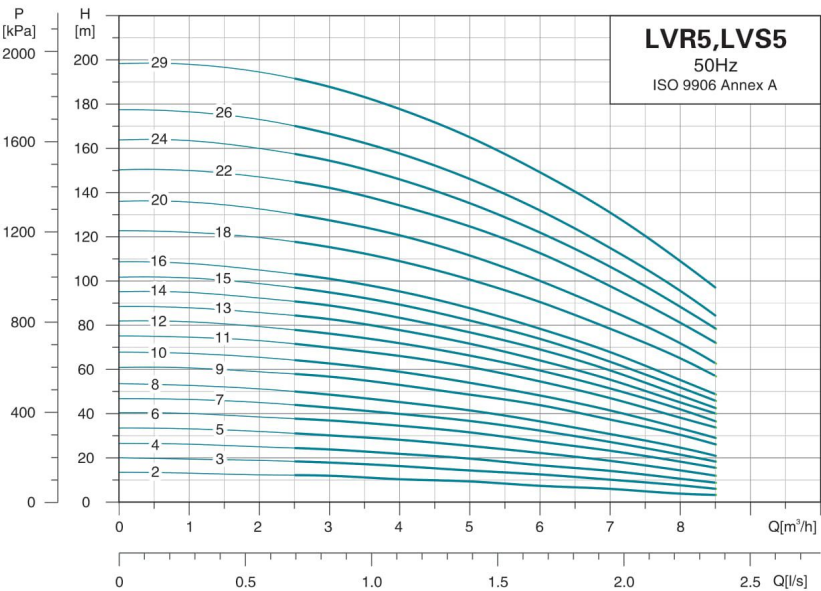


Dimension Drawing

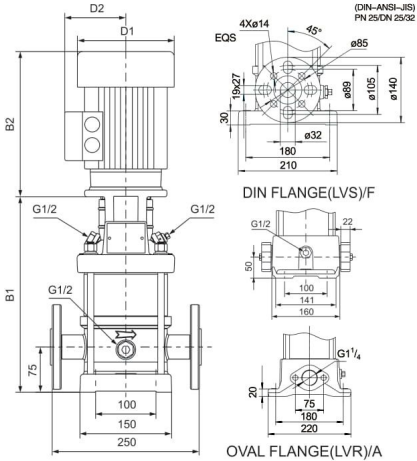

MODEL	OVAL FLANGE(LVR)		DIN FLANGE(LVS)		D1	D2
	B1	B1+B2	B1	B1+B2		
5-2	256	486	282	512	136	109
5-3	283	513	309	539	136	109
5-4	310	540	336	566	136	109
5-5	341	591	367	617	155	124
5-6	368	618	394	644	155	124
5-7	395	645	421	671	155	124
5-8	422	672	448	698	155	124
5-9	465	775	491	801	175	137
5-10	492	802	518	828	175	137
5-11	519	829	545	855	175	137
5-12	546	856	572	882	175	137
5-13	573	883	599	909	175	137
5-14	600	910	626	936	175	137
5-15	627	937	653	963	175	137
5-16	654	964	680	990	175	137
5-18	712	1042	738	1068	195	151
5-20	766	1096	792	1122	195	151
5-22	820	1177	846	1203	219	169
5-24	874	1231	900	1257	219	169
5-26	928	1285	954	1311	219	169
5-29	1009	1366	1035	1392	219	169

Note: B1 and B1+B2 of clamp connector and threaded connector are in compliance with that of DIN flange.

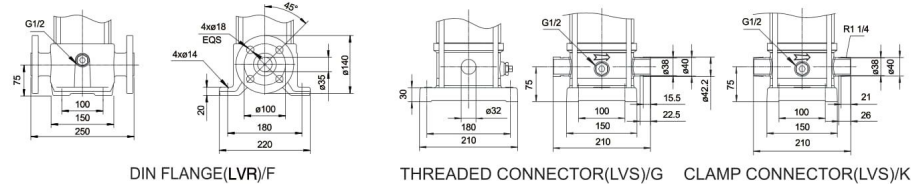

MODEL	POWER[kW]	Q[m³/h]	1.0	2.0	3.0	4.0	5.0	6.0	7.0
5-2	0.37	H(m)	13	12	12	10	9	7	6
5-3	0.55		19	19	18	16	15	12	10
5-4	0.55		26	25	24	22	19	16	14
5-5	0.75		33	32	30	28	24	22	18
5-6	1.1		40	38	37	34	28	27	23
5-7	1.1		46	45	42	40	32	32	27
5-8	1.1		53	51	48	45	40	36	31
5-9	1.5		60	59	56	53	47	44	37
5-10	1.5		67	65	62	59	53	48	41
5-11	2.2		74	73	70	66	59	54	47
5-12	2.2		81	79	76	72	63	59	51
5-13	2.2		88	85	82	78	68	64	55
5-14	2.2		95	92	89	83	74	69	60
5-15	2.2		101	99	95	89	79	74	63
5-16	2.2		108	105	101	95	85	78	68
5-18	3.0		122	119	115	109	98	90	78
5-20	3.0		135	132	127	120	108	100	87
5-22	4.0		150	147	142	134	120	112	97
5-24	4.0		163	160	154	146	132	122	106
5-26	4.0		176	173	166	157	145	132	115
5-29	4.0		198	194	188	178	155	149	131