

Serie COMPACT

C 40

38.9900.97.3

Pompa a 3 pistoni in ceramica. Albero cilindrico Ø 24 mm.

3 ceramic piston pump. Solid shaft diam. 24 mm

Насос с 3 керамическими поршнями. Цилиндрический вал Ø 24 мм.



40.5
l/min

10.7
USGPM






50
bar

725
P.S.I.

Easylube™

Smartcase™

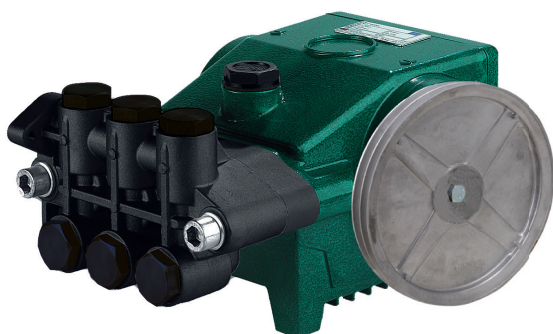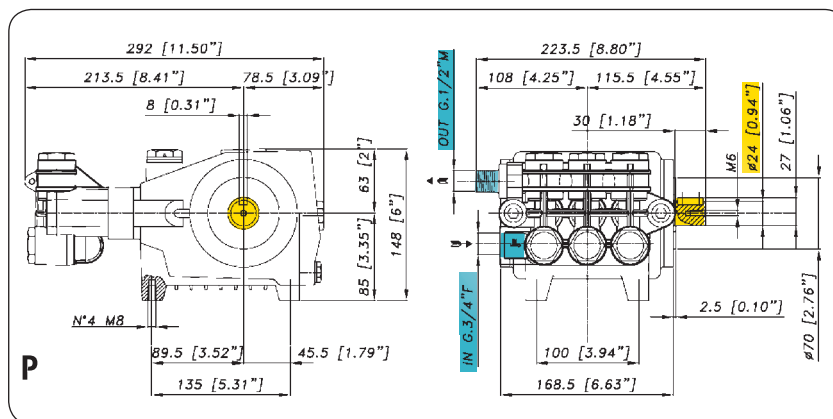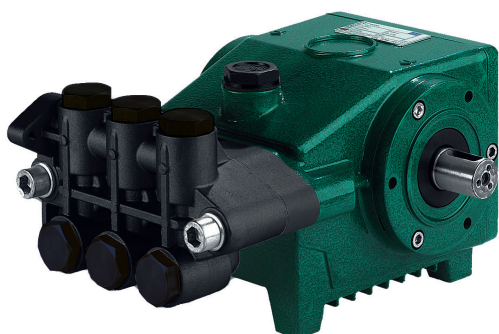

Applicazione con puleggia, vedi a pag. 105

Application with pulley, see page 105


Применение со шкивом, см. страницу. 105

ACCESSORI - ACCESSORIES - АКЦЕССУАРЫ



ACCESSORI D'AZIONAMENTO
DRIVE ACCESSORIES

Pag. 105

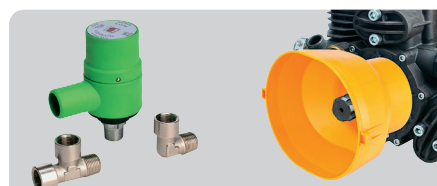

DISPOSITIVI DI SICUREZZA
SAFETY ACCESSORIES

Pag. 106

Pag. 106



GRUPPI DI COMANDO
CONTROL UNITS

Pag. 92



COLLEGAMENTO
CONNECT

Pag. 107



FILTRI
FILTERS

Pag. 107

Caratteristiche tecniche

Specifications

Технические характеристики

g/min; R.P.M.; об/мин		g/min	R.P.M.	1450	1450
Potenza - Power - Мощность		KW	HP	4	5,1
Peso - Weight - Bec		Kg	lb	12	24,6
Dislivello aspirazione Negative pressure Перепад уровней	MAX	mt	ft	1,5	4,9
	Servizio discontinuo - Discontinuos Service - Прерывистая работа	mt	ft	3	9,8
Ø Aspirazione - Ø Intake - Ø Вход		mm	in	G.1/2	G.1/2
Ø Mandata - Ø High pressure - Ø Выход		mm	in	G.1/2	G.1/2
Max. Temperatura - Max temperature - Температура		°C	°F	60	140
Tipo olio - Oil type - Тип масла		SAE	W	SAE 30	30 W
Capacità olio - Oil capacity - Объем масла		lt	U.S.G.	0,95	0,25

TABELLA RENDIMENTI - PERFORMANCE CHART

ТАБЛИЦА ПРОИЗВОДИТЕЛЬНОСТИ

g./min; R.P.M.; об/мин		800		1000		1200		1450	
BAR		L/min	KW	L/min	KW	L/min	KW	L/min	KW
P.S.I.		USGPM	HP	USGPM	HP	USGPM	HP	USGPM	HP
2		22,3	0,1	27,9	0,1	33,5	0,1	40,5	0,2
	29	5,9	0,1	7,4	0,1	8,9	0,2	10,7	0,2
30		22,1	1,3	27,6	1,6	33,1	2,0	40,0	2,4
	435	5,8	1,7	7,3	2,2	8,7	2,6	10,6	3,1
40		21,8	1,7	27,2	2,1	32,7	2,6	39,5	3,1
	580	5,8	2,3	7,2	2,9	8,6	3,4	10,4	4,1
50		21,5	2,1	26,9	2,6	32,3	3,2	39,0	3,8
	725	5,7	2,8	7,1	3,5	8,5	4,2	10,3	5,1