

Serie COMPACT

C 75

53.7000.97.3 - P

53.7001.97.3 - PP



67
l/min

17.4
USGPM



50
bar

725
P.S.I.

Pompa a 3 pistoni in ceramica. "P" Albero scanalato 1" 3/8 anteriore e cilindrico Ø 35 mm. posteriore.

3 ceramic piston pump. "P" Front: male spline shaft 1" 3/8 - Rear: solid shaft diam. 35mm

Насос с 3 керамическими поршнями "P" Шлицевой вал 1" 3/8 передний и цилиндрический Ø 35mm задний.

Pompa a 3 pistoni in ceramica. "PP" Albero cilindrico Ø 35 mm.

3 ceramic piston pump. "PP" Solid shaft diam. 35mm




Насос с 3 керамическими поршнями. "PP" Цилиндрический вал Ø 35 mm.



Easylube™

Smartcase™

SuperCoolingsystem™

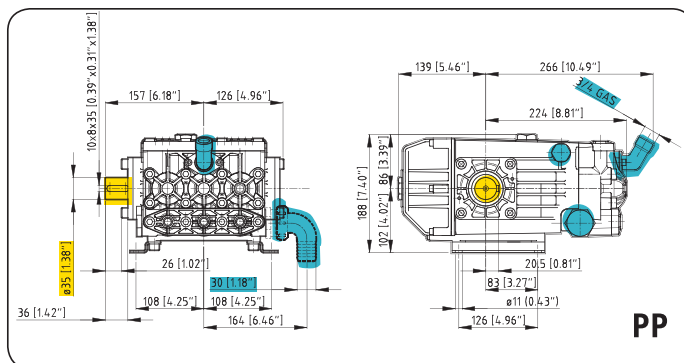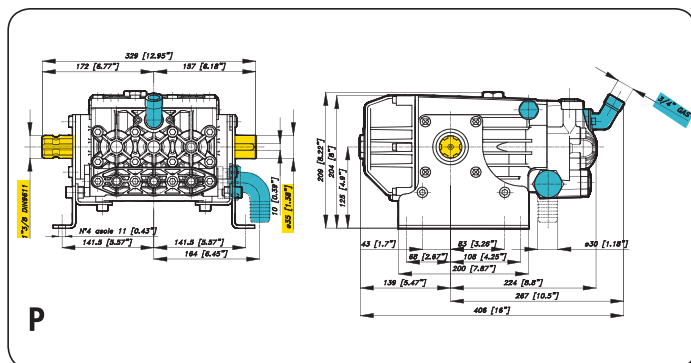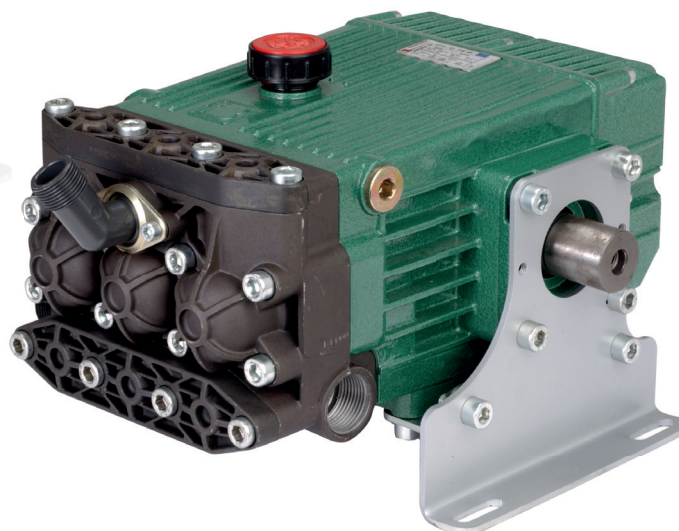

Caratteristiche tecniche

Specifications

Технические характеристики

g/min; R.P.M.; об/мин		g/min	R.P.M.	550	550
Potenza - Power - Мощность		KW	HP	6,6	8,8
Peso- Weight - Bec		Kg	lb	21	46,2
Dislivello aspirazione	MAX	mt	ft	1,5	4,9
Negative pressure					
Перепад уровней	Servizio discontinuo - Discontinuous Service - Прерывистая работа	mt	ft	3	9,8
Ø Aspirazione - Ø Intake - Ø Вход		mm	in	30	1”3/16
Ø Mandata - Ø High pressure - Ø Выход		mm	in	G.3/4	G.3/4
Max. Temperatura - Max temperature - Температура		°C	°F	60	140
Tipo olio - Oil type - Тип масла		SAE	W	SAE 30	30 W
Capacità olio - Oil capacity - Объем масла		lt	U.S.G.	2	0,53

TABELLA RENDIMENTI - PERFORMANCE CHART

ТАБЛИЦА ПРОИЗВОДИТЕЛЬНОСТИ

g/min; R.P.M.; об/мин		400		450		500		550	
BAR		L/min	KW	L/min	KW	L/min	KW	L/min	KW
P.S.I.		USGPM	HP	USGPM	HP	USGPM	HP	USGPM	HP
2		48,7	0,2	54,8	0,2	60,9	0,2	67,0	0,3
29		12,9	0,3	14,5	0,3	16,1	0,3	17,7	0,4
30		48,0	2,8	54,0	3,2	60,0	3,5	66,0	3,9
435		12,7	3,8	14,3	4,3	15,9	4,7	17,4	5,2
40		47,3	3,7	53,2	4,2	59,1	4,6	65,0	5,1
580		12,5	5,0	14,1	5,6	15,6	6,2	17,2	6,8
50		46,5	4,6	52,4	5,1	58,2	5,7	64,0	6,3
725		12,3	6,1	13,8	6,9	15,4	7,6	16,9	8,4