

Serie **COMPACT**

CK 110 - CK 120

IntelliSeal™

EasyLube™

SmartCase™



ACCESSORI - ACCESSORIES - АКЦЕССУАРИ



ACCESSORI D'AZIONAMENTO
DRIVE ACCESSORIES

Pag. 105



DISPOSITIVI DI SICUREZZA
SAFETY ACCESSORIES

Pag. 106

Pag. 106



GRUPPI DI COMANDO
CONTROL UNITS

Pag. 92



COLLEGAMENTO
CONNECT


Pag. 107



FILTRI
FILTERS

Pag. 107


NEW

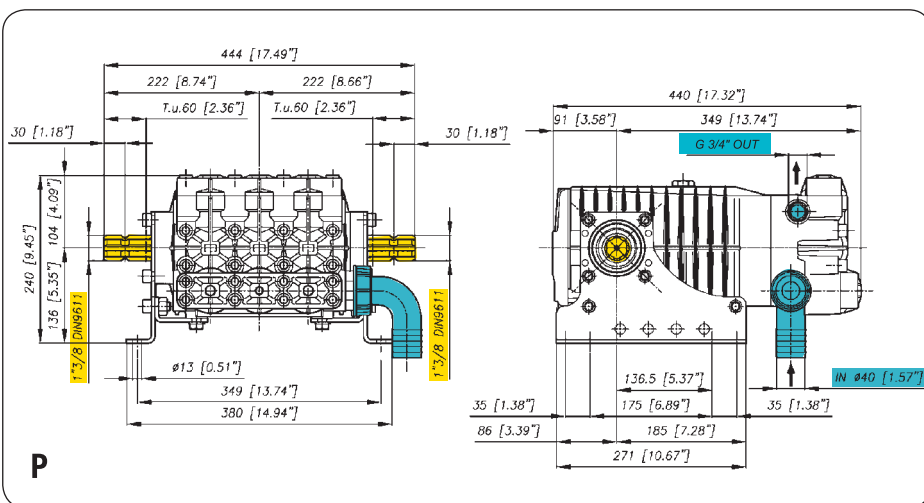

Pompa a 3 pistoni in ceramica.
"P" Albero scanalato 1" 3/8 anteriore e posteriore.

3 ceramic piston pump. "P" spline thru shaft 1"3/8.

Насос с 3 керамическими поршнями. "P" Шлицевой вал 1" 3/8 спереди и сзади.

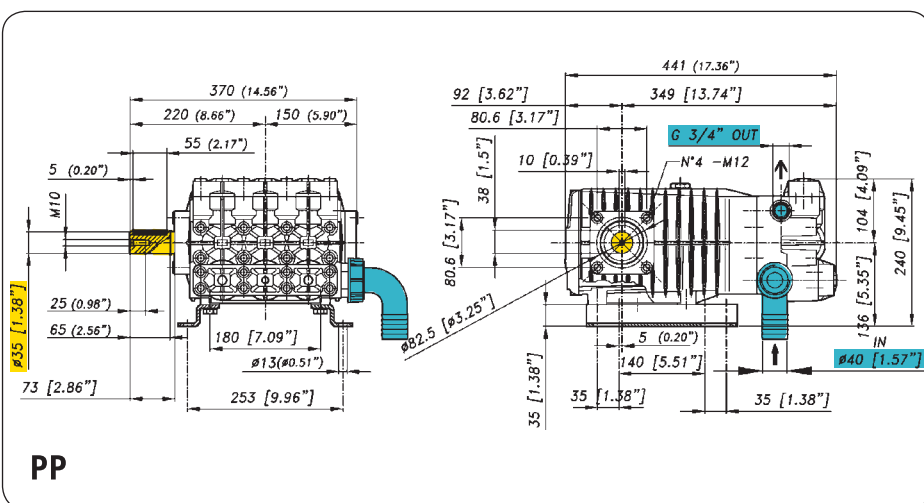

Pompa a 3 pistoni in ceramica.
"PP" Albero cilindrico Ø 35 mm.

3 ceramic piston pump. "PP" Solid shaft diam. 35mm

Насос с 3 керамическими поршнями. "PP" Цилиндрический вал Ø 35 мм.

Serie **COMPACT**

Caratteristiche tecniche Specifications Технические характеристики

g/min; R.P.M.; об/мин	g/min	R.P.M.	550	550
Peso - Weight - Вес	Kg	lb	33	72,6
Dislivello aspirazione	MAX	mt	ft	1,5 4,9
Negative pressure	Servizio discontinuo - Discontinuos Service - Прерывистая работа	mt	ft	3 9,8
Перепад уровней				
Ø Aspirazione - Ø Intake - Ø Вход		mm	in	40 1"9/16
Ø Mandata - Ø High pressure - Ø Выход		mm	in	6,3/4 6,3/4
Max. Temperatura - Max temperature - Температура		°C	°F	60 140
Tipo olio - Oil type - Тип масла		SAE	W	SAE 30 30 W
Capacità olio - Oil capacity - Объем масла		lt	U.S.G.	2,8 0,74



CK 110

TABELLA RENDIMENTI - PERFORMANCE CHART ТАБЛИЦА ПРОИЗВОДИТЕЛЬНОСТИ

g/min; R.P.M.; об/мин	400		450		500		550	
BAR	L/min	KW	L/min	KW	L/min	KW	L/min	KW
P.S.I.	USGPM	HP	USGPM	HP	USGPM	HP	USGPM	HP
2	76,4	0,3	85,9	0,3	95,5	0,4	105	0,4
29	20,2	0,4	22,7	0,5	25,2	0,5	27,7	0,6
30	75,0	4,4	84,4	5,0	93,7	5,5	103,1	6,1
435	19,8	5,9	22,3	6,6	24,8	7,4	27,2	8,1
50	74,2	7,3	83,5	8,2	92,7	9,1	102	10,0
725	19,6	9,7	22,0	10,9	24,5	12,2	26,9	13,4
70	73,5	10,1	82,6	11,4	91,8	12,6	101	13,9
1015	19,4	13,5	21,8	15,2	24,3	16,9	26,7	18,5

 **105** **27.7**
l/min USGPM

 **70** **1015**
bar P.S.I.

73.5002.97.3 - P
73.5102.97.3 - PP

Optionals - По заказу



CK 120

TABELLA RENDIMENTI - PERFORMANCE CHART ТАБЛИЦА ПРОИЗВОДИТЕЛЬНОСТИ

g/min; R.P.M.; об/мин	400		450		500		550	
BAR	L/min	KW	L/min	KW	L/min	KW	L/min	KW
P.S.I.	USGPM	HP	USGPM	HP	USGPM	HP	USGPM	HP
2	83,6	0,3	94,1	0,4	104,5	0,4	115	0,5
29	22,1	0,4	24,9	0,5	27,6	0,5	30,4	0,6
30	82,4	4,9	92,7	5,5	103	6,1	113,3	6,7
435	21,8	6,5	24,5	7,3	27,2	8,1	29,9	8,9
50	81,5	8,0	91,6	9,0	101,8	10,0	112	11,0
725	21,5	10,7	24,2	12	26,9	13,4	29,6	14,7
70	80,8	11,1	90,9	12,5	101	13,9	111,1	15,3
1015	21,3	14,8	24	16,7	26,7	18,5	29,4	20,4

 **115** **30.4**
l/min USGPM

 **70** **1015**
bar P.S.I.

73.5003.97.3 - P
73.5103.97.3 - PP

Optionals - По заказу

