

NEW

Serie COMPACT



144
l/min
38.1
USGPM



60
bar
870
P.S.I.

CK 146

76.7310.97.3 - P

76.7311.97.3 - PP

Pompa a 6 pistoni in ceramica. "P" Albero scanalato 1" 3/8 anteriore e posteriore.

6 ceramic piston pump. "P" spline thru shaft 1" 3/8.

Насос с 6 керамическими поршнями. "P" Шлицевой вал 1" 3 / 8 спереди и сзади.

Pompa a 6 pistoni in ceramica. "PP" Albero cilindrico Ø 35 mm.

6 ceramic piston pump. "PP" Solid shaft diam. 35 mm

Насос с 6 керамическими поршнями "PP" Цилиндрический вал Ø 35 мм.

IntelliSeal™

EasyLube™

SmartCase™

ACCESSORI - ACCESSORIES - АКЦЕССУАРЫ



ACCESSORI D'AZIONAMENTO
DRIVE ACCESSORIES

Pag. 105



DISPOSITIVI DI SICUREZZA
SAFETY ACCESSORIES

Pag. 106



COLLEGAMENTO
FITTING

Pag. 107



GRUPPI DI COMANDO
CONTROL UNITS

Pag. 118




COMPUTER E PANNELLI
COMPUTERS AND SPRAYER CONTROLS

Pag. 150





FILTRI
FILTERS

Pag. 107

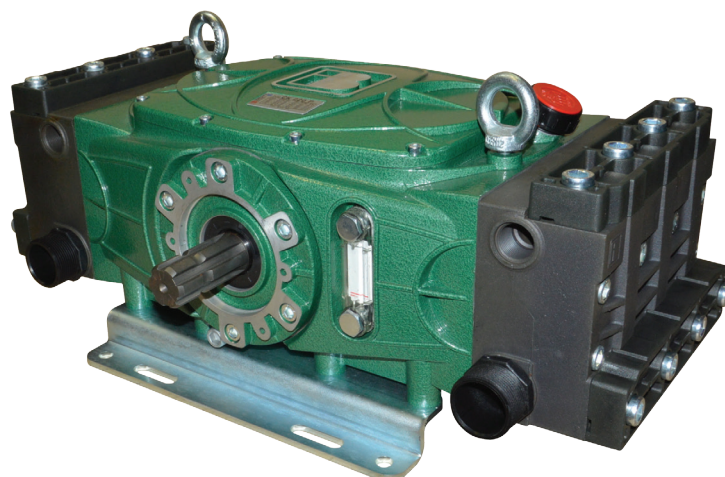

Optional Options По заказу

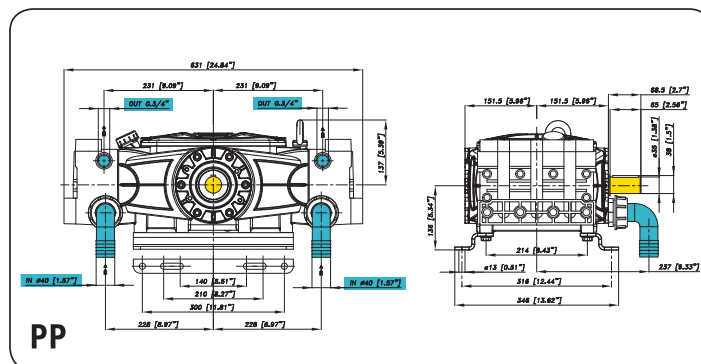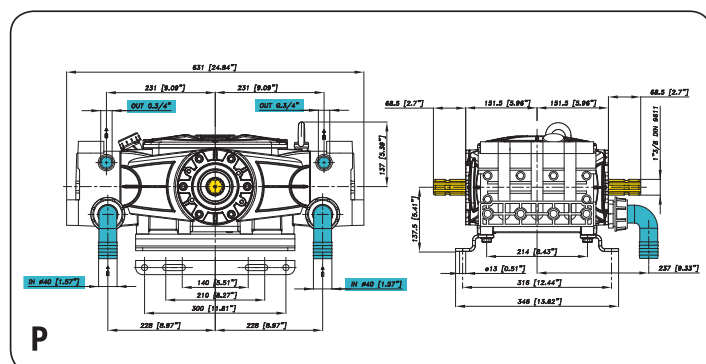

Caratteristiche tecniche

Specifications

Технические характеристики

g/min; R.P.M.; об/мин		g/min	R.P.M.	550	550
Peso - Weight - Вес		Kg	lb	39	85,8
Dislivello aspirazione Negative pressure Перепад уровней	MAX	mt	ft	1,5	4,9
	Servizio discontinuo - Discontinuous Service - Прерывистая работа	mt	ft	3	9,8
Ø Aspirazione - Ø Intake - Ø Вход		mm	in	2X40	1"9/16
Ø Mandata - Ø High pressure - Ø Выход		mm	in	G.3/4	G.3/4
Max. Temperatura - Max temperature - Температура		°C	°F	60	140
Tipo olio - Oil type - Тип масла		SAE	W	SAE 30	30W
Capacità olio - Oil capacity - Объем масла		lt	U.S.G.	2,8	0,74

TABELLA RENDIMENTI - PERFORMANCE CHART ТАБЛИЦА ПРОИЗВОДИТЕЛЬНОСТИ

g/min; R.P.M.; об/мин		400		450		500		550	
BAR	P.S.I.	L/min USGPM	KW HP	L/min USGPM	KW HP	L/min USGPM	KW HP	L/min USGPM	KW HP
2	29	103,1 27,2	0,4 0,5	113,4 30,0	0,4 0,6	123,7 32,7	0,5 0,6	144,3 38,1	0,6 0,8
20	290	102,1 27,0	4,0 5,4	112,4 29,7	4,4 5,9	122,6 32,4	4,8 6,4	143,0 37,8	5,6 7,5
40	580	101,4 26,8	8,0 10,6	111,6 29,5	8,8 11,7	121,7 32,2	9,6 12,8	142,0 37,5	11,2 14,9
60	870	100,7 26,6	11,9 15,9	110,8 29,3	13,1 17,4	120,9 31,9	14,2 19,0	141,0 37,3	16,6 22,2