

FAG


7307-B-XL-MP

Angular contact ball bearing

Schaeffler ID:
0167259300000Angular contact ball bearing 73..-B-XL-MP,
single row, X-life, solid brass cage

X-life

Technical information

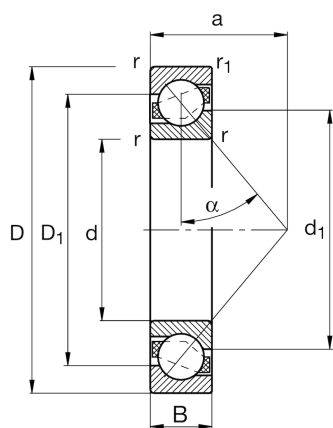

Main Dimensions & Performance Data

d	35 mm	Bore diameter
D	80 mm	Outside diameter
B	21 mm	Width
C _r	45.500 N	Basic dynamic load rating, radial
C _{0r}	27.500 N	Basic static load rating, radial
C _{ur}	1.910 N	Fatigue load limit, radial
n _G	15.500 1/min	Limiting speed
n _{gr}	7.900 1/min	Reference speed
	0,498 kg	Weight

Additional information

r _{min}	1,5 mm	Minimum chamfer dimension
r _{1 min}	1 mm	Minimum chamfer dimension
D ₁	63 mm	Shoulder diameter on outer ring wide side face
d ₁	53,12 mm	Shoulder diameter on inner ring wide side face
a	35 mm	Distance between the apexes of the pressure cones
α	40 °	Contact angle

Mounting dimensions

d _{a min}	44 mm	Minimum diameter of shaft shoulder
D _{a max}	71 mm	Maximum diameter of housing shoulder
D _{b max}	74,4 mm	Maximaler Durchmesser der Gehäuseschulter
r _{a max}	1,5 mm	Maximum fillet radius of shaft
r _{a1 max}	1 mm	Maximum fillet radius of housing

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	150 °C	Operating temperature max.

