

[TopPage](#)>>[Search Result](#)>>6022ZNR

Deep-groove Ball Bearings

Bearing No. : **NACHI 6022ZNR**

■ **Bearing Type** Snap Ring and Shield ▼



■ **Clearance** CN(Normal) ▼

■ **Tolerance Class** Normal Class ▼

(0.015~0.041)

Dimensions

d = 110
0
-0.020
D = 170
0
-0.025
B = 28
0
-0.200
r = 2~3.5
(Radial Direction)
r = 2~5
(Axial Direction)
r1 = 0.5~
(Radial Direction)
r1 = 0.5~
(Axial Direction)
D1 = 163.65
a = 3.71
D2 = 182.9
f = 3.1

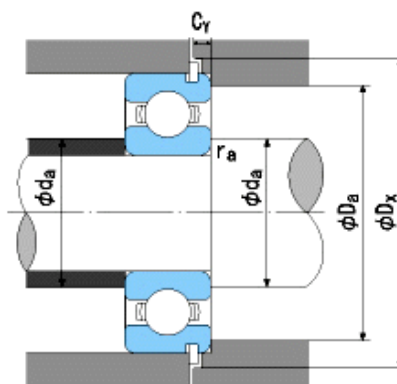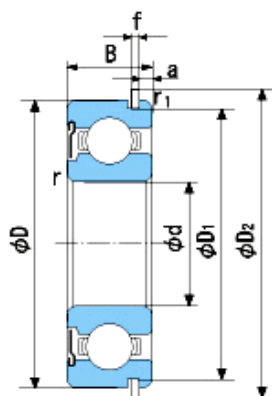

Dimensions

da(min) = 118
Da(max) = 162
Dx(min) = 185
ra(max) = 2
Cy(max) = 6.4

Basic Dynamic Load Rating Cr : **84,500** N

Basic Static Load Rating Cor : **73,000** N

Limiting Speed ;

Grease Lubrication : **3,800** min⁻¹

Oil Lubrication : **4,500** min⁻¹

	INNER RING	OUTER RING
O.D.Surface Runout with Side :		-
Axial Runout with Bore :	-	
Axial Runout with Raceway :	-	
Width Variation :	0.025	0.025
Radial Runout :	0.025	0.045