


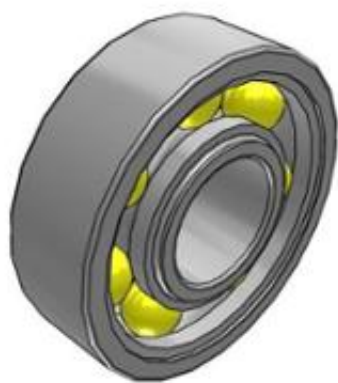

6000-RSL Deep groove ball bearings

- SKF Explorer

Deep groove ball bearings

Bearing data

[Tolerances,](#)

Normal (metric), P6, P5, Normal (inch),

[Radial internal clearance,](#)

Matched bearing pairs, Stainless steel


$d < 10$ mm, Other bearings

Bearing interfaces

[Seat tolerances for standard conditions,](#)

[Tolerances and resultant fits](#)

Technical specification




DIMENSIONS

d	10 mm	Bore diameter
D	26 mm	Outside diameter
B	8 mm	Width
d_2	≈ 12.55 mm	Recess diameter
D_2	≈ 22.6 mm	Recess diameter
$r_{1,2}$	min. 0.3 mm	Chamfer dimension

ABUTMENT DIMENSIONS

d_{ϵ} min. 12 mm	Diameter of shaft abutment
d_{ϵ} max. 12.5 mm	Diameter of shaft abutment
D_{ϵ} max. 24 mm	Diameter of housing abutment
r_a max. 0.3 mm	Radius of shaft or housing fillet

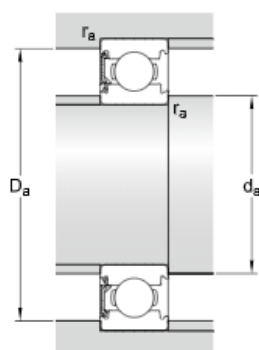

CALCULATION DATA

C	4.75 kN	Basic dynamic load rating
C ₀	1.96 kN	Basic static load rating
P _u	0.083 kN	Fatigue load limit
	67 000 r/min	Reference speed
	40 000 r/min	Limiting speed
k _r	0.025	Minimum load factor
f ₀	12	Calculation factor

MASS

0.019 kg	Mass bearing
----------	--------------

TOLERANCE CLASS

P6	Dimensional tolerances
P5	Radial run-out