



2208 ETN9 Self-aligning ball bearings

- Popular item

Self-aligning ball bearings


Bearing data

Tolerances,
Normal, JS7,
Radial internal clearance,
table

Bearing interfaceS

Seat tolerances for standard
conditions,
Tolerances and resultant fits

Technical specification

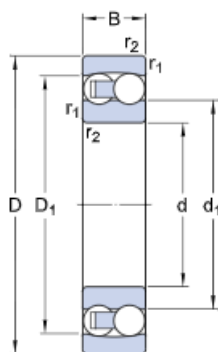


DIMENSIONS

d	40 mm	Bore diameter
D	80 mm	Outside diameter
B	23 mm	Width
d ₁	≈ 52.39 mm	Shoulder diameter inner ring
D ₁	≈ 70.2 mm	Shoulder diameter outer ring
r _{1,2}	min. 1.1 mm	Chamfer dimension

ABUTMENT DIMENSIONS

d _a	min. 47 mm	Abutment diameter shaft
D _i	max. 73 mm	Abutment diameter housing
r _a	max. 1.1 mm	Fillet radius



CALCULATION DATA

C	31.9 kN	Basic dynamic load rating
C ₀	10 kN	Basic static load rating
P _u	0.51 kN	Fatigue load limit
	16 000 r/min	Reference speed
	11 000 r/min	Limiting speed
α	2.5 °	Permissible angular misalignment
k _r	0.045	Calculation factor
e	0.28	Calculation factor
Y ₀	2.5	Calculation factor
Y ₁	2.2	Calculation factor
Y ₂	3.5	Calculation factor

MASS

0.51 kg	Mass bearing
---------	--------------