



3208 A-2ZTN9/MT33 Angular contact ball bearings, double row

- Popular item

- SKF Explorer

Angular contact ball bearings, double row

Bearing data

[Tolerances](#),

Normal, P6, P5,

[Internal clearance](#),


table, drawing no

Bearing interfaces

[Seat tolerances for standard conditions](#),

[Tolerances and resultant fit](#)

Technical specification

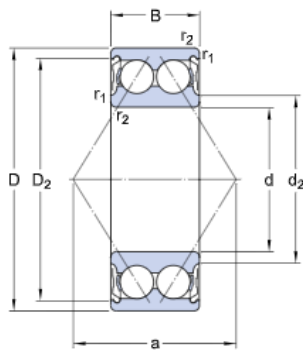


DIMENSIONS

d	40 mm	Bore diameter
D	80 mm	Outside diameter
B	30.2 mm	Width
d ₂	≈ 47.8 mm	Recess diameter inner ring shoulder
D ₂	≈ 72.1 mm	Recess diameter outer ring shoulder
r _{1,2}	min. 1.1 mm	Chamfer dimension inner ring
a	46 mm	Distance pressure point(s)

ABUTMENT DIMENSIONS

d _a	min. 47 mm	Abutment diameter shaft
d _a	max. 48 mm	Abutment diameter shaft
D _i	max. 73 mm	Abutment diameter housing
r _a	max. 1 mm	Fillet radius



CALCULATION DATA

C	48 kN	Basic dynamic load rating
C ₀	36.5 kN	Basic static load rating
P _u	1.56 kN	Fatigue load limit
	9 000 r/min	Reference speed
	8 000 r/min	Limiting speed
k _r	0.06	Calculation factor
e	0.8	Calculation factor
X	0.63	Calculation factor
Y ₀	0.66	Calculation factor
Y ₁	0.78	Calculation factor
Y ₂	1.24	Calculation factor

MASS

0.57 kg	Mass bearing
---------	--------------