



3216 A Angular contact ball bearings, double row

- Popular item

Angular contact ball bearings, double row

Bearing data

[Tolerances](#),

Normal, P6, P5,

[Internal clearance](#),


table, drawing no

Bearing interfaces

[Seat tolerances for standard conditions](#),

[Tolerances and resultant fit](#)

Technical specification

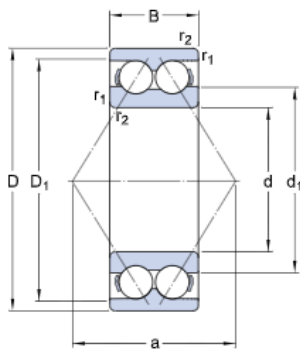


DIMENSIONS

d	80 mm	Bore diameter
D	140 mm	Outside diameter
B	44.4 mm	Width
d ₁	≈ 97.66 mm	Shoulder diameter inner ring
D ₁	≈ 119.61 mm	Shoulder diameter outer ring
r _{1,2}	min. 2 mm	Chamfer dimension inner ring
a	82 mm	Distance pressure point(s)

ABUTMENT DIMENSIONS

d _a	min. 91 mm	Abutment diameter shaft
D _i	max. 129 mm	Abutment diameter housing
r _a	max. 2 mm	Fillet radius



CALCULATION DATA

C	106 kN	Basic dynamic load rating
C ₀	95 kN	Basic static load rating
P _u	3.9 kN	Fatigue load limit
	5 000 r/min	Reference speed
	4 300 r/min	Limiting speed
k _r	0.06	Calculation factor
e	0.8	Calculation factor
X	0.63	Calculation factor
Y ₀	0.66	Calculation factor
Y ₁	0.78	Calculation factor
Y ₂	1.24	Calculation factor

MASS

	2.65 kg	Mass bearing
--	---------	--------------