

## The Timken Company 4500 Mt Pleasant St. NW N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: <u>CustomerCAD@timken.com</u> • Web site: <u>www.timken.com</u>

Part Number 6001-Z-C3, Deep Groove Ball Bearings (6000, 6200, 6300, 6400)

Timken's deep groove ball bearings deliver reliable performance in a wide range of applications and conditions. With super-finished raceways and controlled geometries, our premium design helps ensure consistent quality.



## <u>Specifications</u> | <u>Dimensions</u> | <u>Basic Load Ratings</u> | <u>Factors</u>

Specifications –				
	Clearance	C3		
	Bore Size d	12.000 mm		
	Features	One Shield		
	Bearing Type	Standard DGBB		
	Weight	0.020 Kg		
	Manufacturing Part Number	6001ZC3		

Dimensions		-
utside Diameter D	28.000 mm	




Outside Ring Width B	8.000 mm
Radius Rs min	0.300 mm

Cr - Dynamic Load Rating 5.1 kN  C0r - Static Load Rating 2.4 kN	Ba	sic Load Ratings	-	
COr - Static Load Rating 2.4 kN		Cr - Dynamic Load Rating	5.1 kN	
		C0r - Static Load Rating	2.4 kN	

Fac	tors		-
	Grease Reference Speed	23000 rpm	
	Oil Reference Speed	33000 rpm	



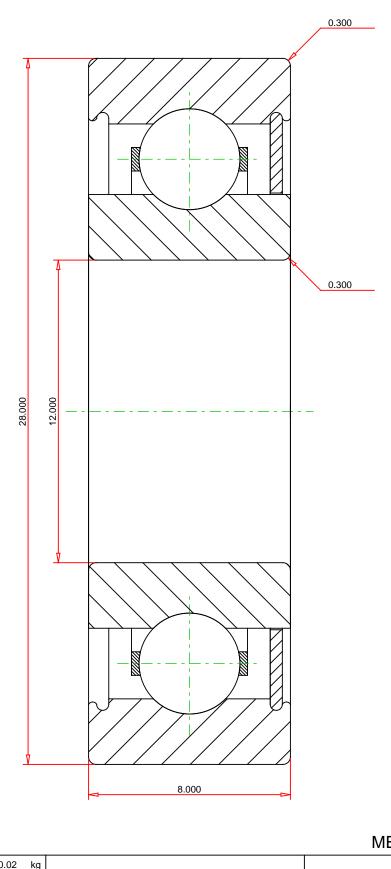

**METRIC UNITS** 

Weight 0.02 kg

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

6001-Z-C3

Deep Groove Ball Bearings (6000, 6200, 6300, 6400)

Dynamic Load Rating Static Load Rating 5100 N 2400 N

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY