

## **The Timken Company** 4500 Mt Pleasant St. NW N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: <u>CustomerCAD@timken.com</u> • Web site: <u>www.timken.com</u>

Part Number 6002-NR, Deep Groove Ball Bearings (6000, 6200, 6300, 6400)

Timken's deep groove ball bearings deliver reliable performance in a wide range of applications and conditions. With super-finished raceways and controlled geometries, our premium design helps ensure consistent quality.



## <u>Specifications</u> | <u>Dimensions</u> | <u>Basic Load Ratings</u> | <u>Factors</u>

Specifications -			
	Clearance	C0 (Normal)	
	Bore Size d	15.000 mm	
	Features	Snap Ring	
	Bearing Type	Standard DGBB	
	Weight	0.030 Kg	

Dimensions		-
Outside Diameter D	32.000 mm	
utside Ring Width B	9.000 mm	




Radius Rs min	0.300 mm
Snap Ring Diameter D2 max	36.700 mm
Snap Ring Width f max	1.120 mm

Cr - Dynamic Load Rating 5.6 kN	Basic Load Ratings				-
	Cr - Dynamic L	oad Rating	5.6 kN		
COr - Static Load Rating 2.8 kN	COr - Static Loa	ad Rating	2.8 kN		

Grease Reference Speed 20000 rpm	Fac	tors		-
0:1 Defending Control 200000		Grease Reference Speed	20000 rpm	
Oil Reference Speed 30000 rpm		Oil Reference Speed	30000 rpm	



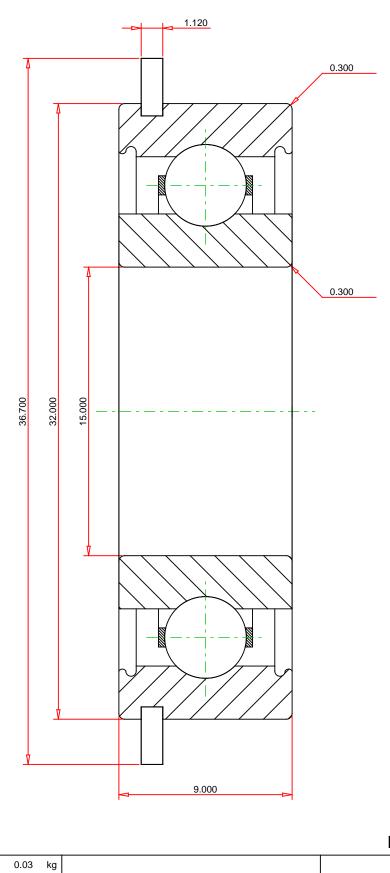

METRIC UNITS

Weight 0.03 kg

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

6002-NR

Deep Groove Ball Bearings (6000, 6200, 6300, 6400)

Dynamic Load Rating Static Load Rating 5600 N 2800 N

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY