

The Timken Company 4500 Mt Pleasant St. NW N. Canton, OH 44720


Phone: (234) 262-3000

E-Mail: <u>CustomerCAD@timken.com</u> • Web site: <u>www.timken.com</u>

Part Number 61807-2RZ, Thin Section Ball Bearings (61700, 61800, 61900)

Timken's deep groove ball bearings deliver reliable performance in a wide range of applications and conditions. With super-finished raceways and controlled geometries, our premium design helps ensure consistent quality.





<u>Specifications</u> | <u>Dimensions</u> | <u>Basic Load Ratings</u> | <u>Factors</u>

Clearance CO (Normal) Bore Size d 35.000 mm
Bore Size d 35.000 mm
Features Non-Contact Seals
Weight 0.0270 Kg


Dir	nensions		-
	Outside Diameter D	47.000 mm	
	Outside Ring Width B	7.000 mm	
	adius Rs min	0.300 mm	



Bas	ic Load Ratings		-
	Cr - Dynamic Load Rating	4.7 kN	
	C0r - Static Load Rating	3.8 kN	

Grease Limiting Speed 13000 rpm Oil Limiting Speed 16000 rpm	Factors		-
Oil Limiting Speed 16000 rpm	Grease Limiting Speed	13000 rpm	
	Oil Limiting Speed	16000 rpm	



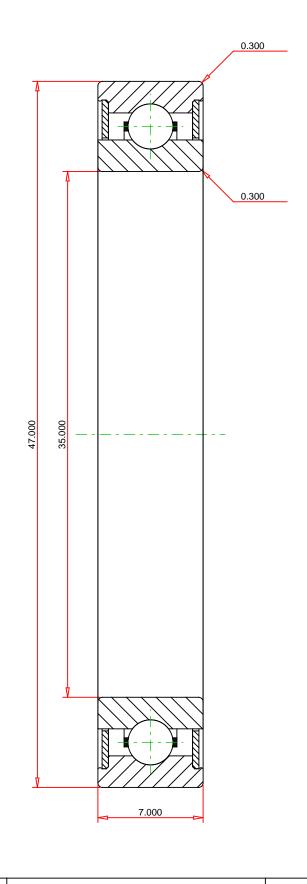

METRIC UNITS

61807-2RZ

Weight 0.02

Thin Section Ball Bearings (61700, 61800, 61900)

NORTH CANTON, OHIO USA

THE TIMKEN COMPANY

Dynamic Load Rating Static Load Rating

4600 2000

FOR DISCUSSION ONLY

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.