

The Timken Company 4500 Mt Pleasant St. NW N. Canton, OH 44720 Phone: (234) 262-3000

E-Mail: <u>CustomerCAD@timken.com</u> • Web site: <u>www.timken.com</u>

Part Number 6206-2RZ-C3, Deep Groove Ball Bearings (6000, 6200, 6300, 6400)

Timken's deep groove ball bearings deliver reliable performance in a wide range of applications and conditions. With super-finished raceways and controlled geometries, our premium design helps ensure consistent quality.



<u>Specifications</u> | <u>Dimensions</u> | <u>Basic Load Ratings</u> | <u>Factors</u>

Specifications –		
	Clearance	C3
	Bore Size d	30.000 mm
	Features	Non-Contact Seals
	Bearing Type	Standard DGBB
	Weight	0.2 Kg

Dimensions		-)
Outside Diameter D	62.000 mm	
utside Ring Width B	16.000 mm	




Radius Rs min	1.000 mm
---------------	----------

Cr - Dynamic Load Rating 19.5 kN C0r - Static Load Rating 11.3 kN	Ва	sic Load Ratings			-
COr - Static Load Rating 11.3 kN		Cr - Dynamic Load Rating	19.5 kN		
		COr - Static Load Rating	11.3 kN		

Factors		-
Grease Reference Speed	11000 rpm	
Oil Reference Speed	16000 rpm	



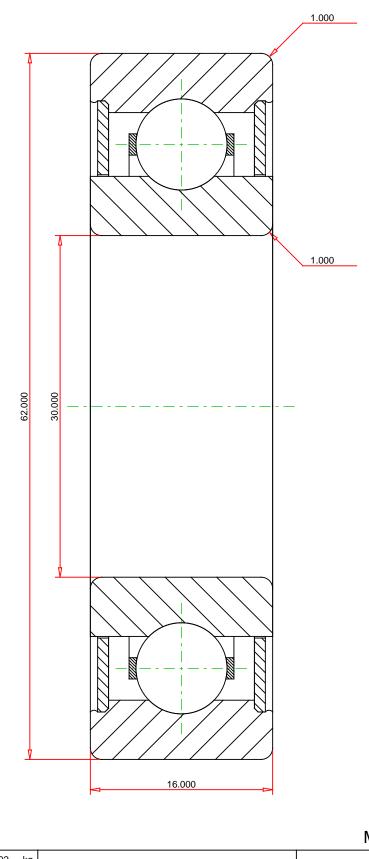

METRIC UNITS

Weight 0.02 k

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

6206-2RZ-C3

Deep Groove Ball Bearings (6000, 6200, 6300, 6400)

Dynamic Load Rating Static Load Rating 4600 N 2000 N

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY