

FAG


7200-B-XL-2RS-TVP

Angular contact ball bearing

Schaeffler ID:
0206765140000Angular contact ball bearing 72..-B-
XL-2RS-TVP, single row, X-life, seals,
plastic cage

X-life

Technical information

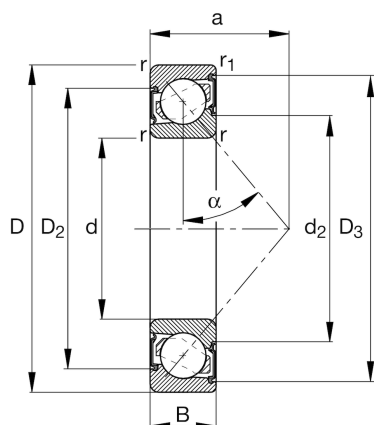

Main Dimensions & Performance Data


d	10 mm	Bore diameter
D	30 mm	Outside diameter
B	9 mm	Width
C_r	5.600 N	Basic dynamic load rating, radial
C_{0r}	2.600 N	Basic static load rating, radial
C_{ur}	179 N	Fatigue load limit, radial
n_G	16.100 1/min	Limiting speed
	0,047 kg	Weight

Additional information

r_{min}	0,6 mm	Minimum chamfer dimension
r_{1min}	0,3 mm	Minimum chamfer dimension
D_1	22 mm	Shoulder diameter on outer ring wide side face
D_2	23,2 mm	Caliber diameter on outer ring wide side face
D_3	25,4 mm	Caliber diameter on outer ring small side face
d_1	18,3 mm	Shoulder diameter on inner ring wide side face
d_2	15,5 mm	Caliber diameter on inner ring wide side face
a	13 mm	Distance between the apexes of the pressure cones
α	40 °	Contact angle

Mounting dimensions

$d_{a min}$	14,2 mm	Minimum diameter of shaft shoulder
$D_{a max}$	25,8 mm	Maximum diameter of housing shoulder
$D_{b max}$	27,6 mm	Maximaler Durchmesser der Gehäuseschulter
$r_{a max}$	0,6 mm	Maximum fillet radius of shaft
$r_{a1 max}$	0,3 mm	Maximum fillet radius of housing

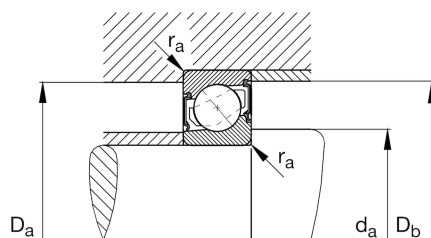

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	100 °C	Operating temperature max.