

FAG


7306-B-XL-2RS-TVP

Angular contact ball bearing

Schaeffler ID:
0390296620000Angular contact ball bearing 73..-B-
XL-2RS-TVP, single row, X-life, seals,
plastic cage

X-life

Technical information

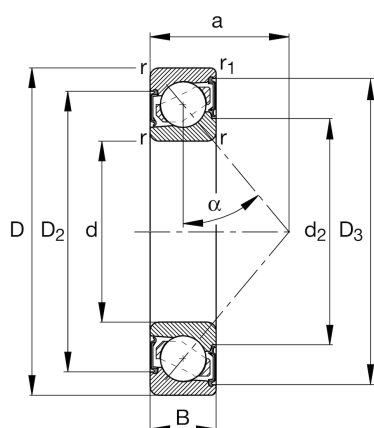

Main Dimensions & Performance Data


d	30 mm	Bore diameter
D	72 mm	Outside diameter
B	19 mm	Width
C_r	37.500 N	Basic dynamic load rating, radial
C_{0r}	22.100 N	Basic static load rating, radial
C_{ur}	1.530 N	Fatigue load limit, radial
n_G	6.000 1/min	Limiting speed
	0,33 kg	Weight

Additional information

r_{min}	1,1 mm	Minimum chamfer dimension
$r_{1 min}$	0,6 mm	Minimum chamfer dimension
D_1	55,9 mm	Shoulder diameter on outer ring wide side face
D_2	58,5 mm	Caliber diameter on outer ring wide side face
D_3	65,9 mm	Caliber diameter on outer ring small side face
d_1	47,1 mm	Shoulder diameter on inner ring wide side face
d_2	42,7 mm	Caliber diameter on inner ring wide side face
a	31 mm	Distance between the apexes of the pressure cones
α	40 °	Contact angle

Mounting dimensions

$d_{a min}$	37 mm	Minimum diameter of shaft shoulder
$D_{a max}$	65 mm	Maximum diameter of housing shoulder
$D_{b max}$	67,8 mm	Maximaler Durchmesser der Gehäuseschulter
$r_{a max}$	1 mm	Maximum fillet radius of shaft
$r_{a1 max}$	0,6 mm	Maximum fillet radius of housing

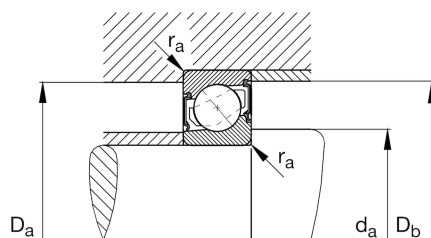

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	100 °C	Operating temperature max.