

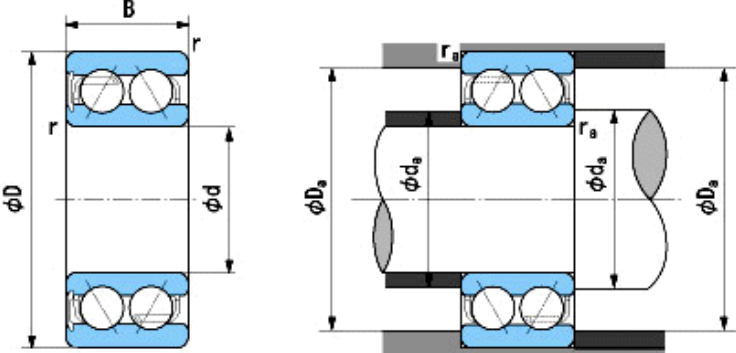
TopPage>>Search Result>>5206ANS

Angular Contact Ball Bearings

Bearing No. : **NACHI 5206ANS**

Bearing Type
Clearance
Tolerance Class

(0.005~0.020)

<p>Dimensions</p> <p>d = 30 0 -0.010</p> <p>D = 62 0 -0.013</p> <p>B = 23.8 0 -0.120</p> <p>r = 1~1.5 (Radial Direction)</p> <p>r = 1~3 (Axial Direction)</p>		<p>Dimensions</p> <p>da(min) = 36</p> <p>Da(max) = 56</p> <p>ra(max) = 1</p> <p>Mass = 0.29 kg</p>
--	---	--

<p>Basic Dynamic Load Rating Cr : 24,400 N</p> <p>Basic Static Load Rating Cor : 17,700 N</p> <p>Limiting Speed ;</p> <p>Grease Lubrication : 7,000 min⁻¹</p> <p>Oil Lubrication : - min⁻¹</p>	<table border="0"> <thead> <tr> <th></th> <th>INNER RING</th> <th>OUTER RING</th> </tr> </thead> <tbody> <tr> <td>O.D.Surface Runout with Side :</td> <td></td> <td>-</td> </tr> <tr> <td>Axial Runout with Bore :</td> <td>-</td> <td>-</td> </tr> <tr> <td>Axial Runout with Raceway :</td> <td>-</td> <td>-</td> </tr> <tr> <td>Width Variation :</td> <td>0.020</td> <td>0.020</td> </tr> <tr> <td>Radial Runout :</td> <td>0.013</td> <td>0.025</td> </tr> </tbody> </table>		INNER RING	OUTER RING	O.D.Surface Runout with Side :		-	Axial Runout with Bore :	-	-	Axial Runout with Raceway :	-	-	Width Variation :	0.020	0.020	Radial Runout :	0.013	0.025
	INNER RING	OUTER RING																	
O.D.Surface Runout with Side :		-																	
Axial Runout with Bore :	-	-																	
Axial Runout with Raceway :	-	-																	
Width Variation :	0.020	0.020																	
Radial Runout :	0.013	0.025																	