

[TopPage](#)>>[Search Result](#)>>6022NR

# Deep-groove Ball Bearings

Bearing No. : **NACHI 6022NR**

■ **Bearing Type** Snap Ring ▼



■ **Clearance** CN(Normal) ▼

■ **Tolerance Class** Normal Class ▼

(0.015~0.041)

## Dimensions

d = 110  
0  
-0.020  
D = 170  
0  
-0.025  
B = 28  
0  
-0.200  
r = 2~3.5  
(Radial Direction)  
r = 2~5  
(Axial Direction)  
r1 = 0.5~  
(Radial Direction)  
r1 = 0.5~  
(Axial Direction)  
D1 = 163.65  
a = 3.71  
D2 = 182.9  
f = 3.1

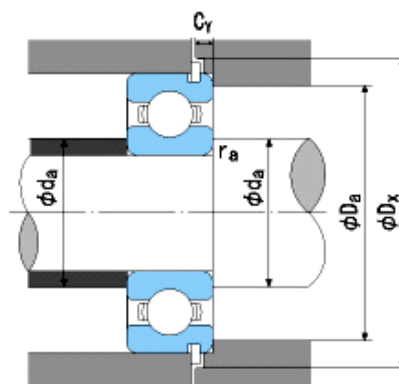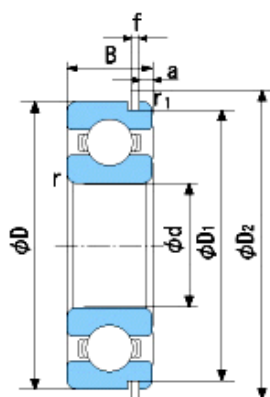

## Dimensions

da(min) = 118  
Da(max) = 162  
Dx(min) = 185  
ra(max) = 2  
Cy(max) = 6.4

Basic Dynamic Load Rating Cr : **84,500** N

Basic Static Load Rating Cor : **73,000** N

Limiting Speed ;

Grease Lubrication : **3,800** min<sup>-1</sup>

Oil Lubrication : **4,500** min<sup>-1</sup>

|                                | INNER RING   | OUTER RING   |
|--------------------------------|--------------|--------------|
| O.D.Surface Runout with Side : | -            | -            |
| Axial Runout with Bore :       | -            | -            |
| Axial Runout with Raceway :    | -            | -            |
| Width Variation :              | <b>0.025</b> | <b>0.025</b> |
| Radial Runout :                | <b>0.025</b> | <b>0.045</b> |