

TopPage>>Search Result>>1322

# Self-aligning Ball Bearings


Bearing No. : **NACHI 1322**

**Bearing Type** 
**Clearance** 
**Tolerance Class**

(0.025~0.056)

**Dimensions**

$d = 110$   $\begin{matrix} 0 \\ -0.020 \end{matrix}$   
 $D = 240$   $\begin{matrix} 0 \\ -0.030 \end{matrix}$   
 $B = 50$   $\begin{matrix} 0 \\ -0.200 \end{matrix}$   
 $r = 3\sim 5$   
 (Radial Direction)  
 $r = 3\sim 8$   
 (Axial Direction)

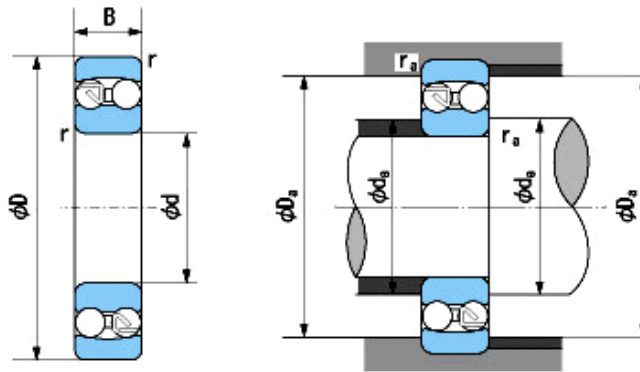

**Dimensions**  
 $d_a(\min) = 123$   
 $D_a(\max) = 227$   
 $r_a(\max) = 2.5$   
 Mass = 11.8 kg

Basic Dynamic Load Rating  $C_r$  : **150,000** N  
 Basic Static Load Rating  $C_{or}$  : **63,200** N  
 Limiting Speed ;  
 Grease Lubrication : **2,400**  $\text{min}^{-1}$   
 Oil Lubrication : **3,000**  $\text{min}^{-1}$

	INNER RING	OUTER RING
O.D.Surface Runout with Side :		-
Axial Runout with Bore :	-	-
Axial Runout with Raceway :	-	-
Width Variation :	<b>0.025</b>	<b>0.025</b>
Radial Runout :	<b>0.025</b>	<b>0.050</b>