

TopPage>>Search Result>>2200

Self-aligning Ball Bearings


Bearing No. : **NACHI 2200**

Bearing Type
Clearance
Tolerance Class

(0.006~0.017)

Dimensions

$d = 10$ $\begin{matrix} 0 \\ -0.008 \end{matrix}$
 $D = 30$ $\begin{matrix} 0 \\ -0.009 \end{matrix}$
 $B = 14$ $\begin{matrix} 0 \\ -0.120 \end{matrix}$
 $r = 0.6 \sim 1$
 (Radial Direction)
 $r = 0.6 \sim 2$
 (Axial Direction)

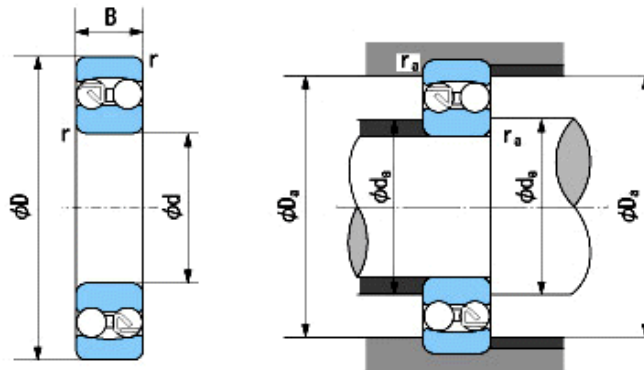

Dimensions

$d_a(\min) = 14$
 $D_a(\max) = 26$
 $r_a(\max) = 0.6$
 Mass = 0.047 kg

Basic Dynamic Load Rating C_r : **7,400** N
 Basic Static Load Rating C_{or} : **1,600** N
 Limiting Speed ;
 Grease Lubrication : **23,000** min^{-1}
 Oil Lubrication : **29,000** min^{-1}

	INNER RING	OUTER RING
O.D.Surface Runout with Side :		-
Axial Runout with Bore :	-	
Axial Runout with Raceway :	-	
Width Variation :	0.015	0.015
Radial Runout :	0.010	0.015