


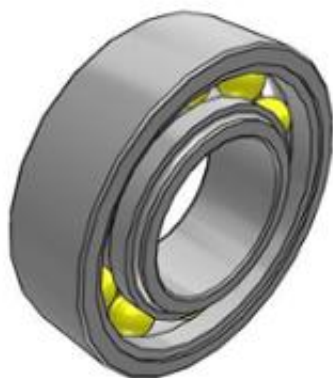

6003-RSL Deep groove ball bearings

- SKF Explorer

Deep groove ball bearings

Bearing data

[Tolerances](#),

Normal (metric), P6, P5, Normal (inch),

[Radial internal clearance](#),

Matched bearing pairs, Stainless steel


$d < 10$ mm, Other bearings

Bearing interfaces

[Seat tolerances for standard conditions](#),

[Tolerances and resultant fits](#)

Technical specification




DIMENSIONS

d	17 mm	Bore diameter
D	35 mm	Outside diameter
B	10 mm	Width
d_2	≈ 20.45 mm	Recess diameter
D_2	≈ 31.2 mm	Recess diameter
$r_{1,2}$	min. 0.3 mm	Chamfer dimension

ABUTMENT DIMENSIONS

d_c min. 19 mm	Diameter of shaft abutment
d_c max. 20.5 mm	Diameter of shaft abutment
D_i max. 33 mm	Diameter of housing abutment
r_a max. 0.3 mm	Radius of shaft or housing fillet

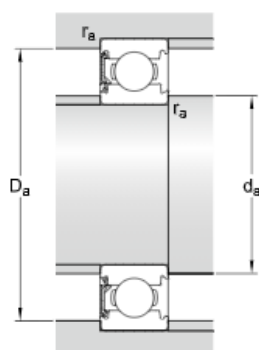

CALCULATION DATA

C	6.37 kN	Basic dynamic load rating
C ₀	3.25 kN	Basic static load rating
P _u	0.137 kN	Fatigue load limit
	45 000 r/min	Reference speed
	28 000 r/min	Limiting speed
k _r	0.025	Minimum load factor
f ₀	14	Calculation factor

MASS

0.039 kg	Mass bearing
----------	--------------

TOLERANCE CLASS

P6	Dimensional tolerances
P5	Radial run-out