



6008-Z Deep groove ball bearings

- SKF Explorer

Deep groove ball bearings

Bearing data

[Tolerances,](#)

Normal (metric), P6, P5, Normal (inch),

[Radial internal clearance,](#)

Matched bearing pairs, Stainless steel


d < 10 mm, Other bearings

Bearing interfaces

[Seat tolerances for standard conditions,](#)

[Tolerances and resultant fits](#)

Technical specification

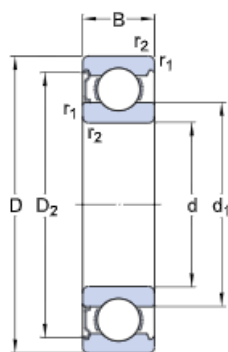


DIMENSIONS

d	40 mm	Bore diameter
D	68 mm	Outside diameter
B	15 mm	Width
d ₁	≈ 49.25 mm	Shoulder diameter
D ₂	≈ 61.1 mm	Recess diameter
r _{1,2}	min. 1 mm	Chamfer dimension

ABUTMENT DIMENSIONS

d _c min. 44.6 mm	Diameter of shaft abutment
d _c max. 49.2 mm	Diameter of shaft abutment
D _i max. 63.4 mm	Diameter of housing abutment
r _a max. 1 mm	Radius of shaft or housing fillet

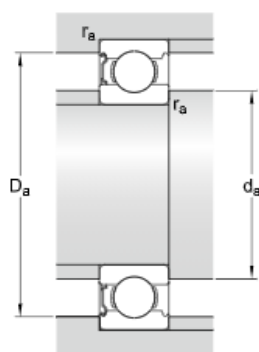

CALCULATION DATA

C	17.8 kN	Basic dynamic load rating
C ₀	11.6 kN	Basic static load rating
P _u	0.49 kN	Fatigue load limit
	22 000 r/min	Reference speed
	14 000 r/min	Limiting speed
k _r	0.025	Minimum load factor
f ₀	15	Calculation factor

MASS

0.2 kg	Mass bearing
--------	--------------

TOLERANCE CLASS

P6	Dimensional tolerances
P6	Radial run-out