



22317 EK

- Popular item
- SKF Explorer

Spherical roller bearings

Bearing data

[Tolerances,](#)

Normal, P6, P5, tapered bore 1:12,
tapered bore 1:30,

[Radial internal clearance,](#)


cylindrical bore, tapered bore

Bearing interfaces

[Seat tolerances for standard conditions,](#)

[Tolerances and resultant fit](#)

Technical specification

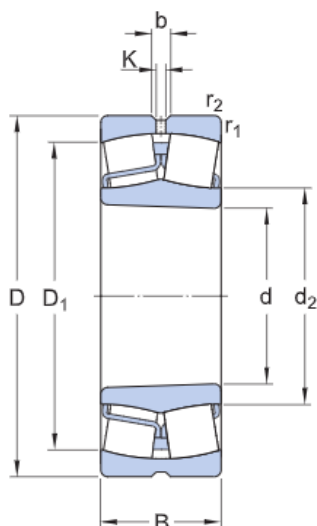


DIMENSIONS

d	85 mm	Bore diameter
D	180 mm	Outside diameter
B	60 mm	Width
d2	≈108 mm	Shoulder diameter of inner ring
D1	≈154 mm	Shoulder/recess diameter of outer ring
b	8.3 mm	Width of lubrication groove
K	4.5 mm	Diameter of lubrication hole
r1,2	min.3 mm	Chamfer dimension
Tapered bore, taper 1:12		

ABUTMENT DIMENSIONS

Da	max.166 mm	Diameter of housing abutment
ra	max.2.5 mm	Radius of fillet



CALCULATION DATA

Basic dynamic load rating	C	577 kN
Basic static load rating	C ₀	620 kN
Fatigue load limit	P _u	61 kN
Reference speed		2 800 r/min
Limiting speed		3 800 r/min
Limiting value	e	0.33
Axial load factor	Y ₁	2
Axial load factor	Y ₂	3
Axial load factor	Y ₀	2

MASS

Mass	7.2 kg
------	--------

MOUNTING INFORMATION

Recommened tightening angle for lock nut	α	150 °
--	----------	-------