



22330 CCK/W33

- Popular item
- SKF Explorer

Spherical roller bearings

Bearing data

[Tolerances,](#)

Normal, P6, P5, tapered bore 1:12,
tapered bore 1:30,

[Radial internal clearance,](#)


cylindrical bore, tapered bore

Bearing interfaces

[Seat tolerances for standard conditions,](#)

[Tolerances and resultant fit](#)

Technical specification

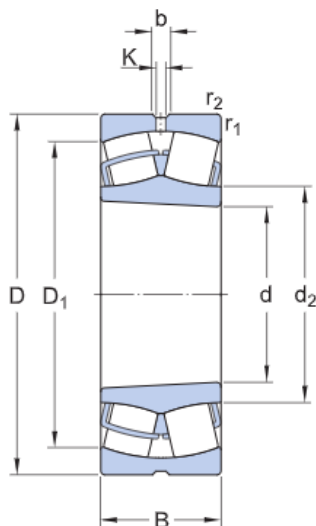


DIMENSIONS

d	150 mm	Bore diameter
D	320 mm	Outside diameter
B	108 mm	Width
d2	≈188 mm	Shoulder diameter of inner ring
D1	≈266 mm	Shoulder/recess diameter of outer ring
b	16.7 mm	Width of lubrication groove
K	9 mm	Diameter of lubrication hole
r1,2	min.4 mm	Chamfer dimension
Tapered bore, taper 1:12		

ABUTMENT DIMENSIONS

Da	max.303 mm	Diameter of housing abutment
ra	max.3 mm	Radius of fillet



CALCULATION DATA

Basic dynamic load rating	C	1 539 kN
Basic static load rating	C ₀	1 760 kN
Fatigue load limit	P _u	146 kN
Reference speed		1 600 r/min
Limiting speed		2 000 r/min
Limiting value	e	0.35
Axial load factor	Y ₁	1.9
Axial load factor	Y ₂	2.9
Axial load factor	Y ₀	1.8

MASS

Mass		41 kg
------	--	-------