



2208 E-2RS1TN9 Self-aligning ball bearings

- Popular item

Self-aligning ball bearings


Bearing data

[Tolerances](#),
Normal, JS7,
[Radial internal clearance](#),
table

Bearing interfaceS

[Seat tolerances for standard conditions](#),
[Tolerances and resultant fits](#)

Technical specification

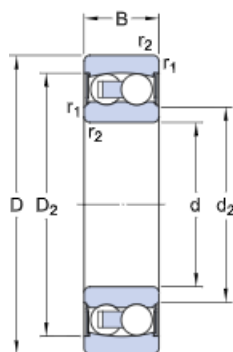


DIMENSIONS

d	40 mm	Bore diameter
D	80 mm	Outside diameter
B	23 mm	Width
d ₂	≈ 49 mm	Recess diameter inner ring
D ₂	≈ 69.8 mm	Recess diameter outer ring
r _{1,2}	min. 1.1 mm	Chamfer dimension

ABUTMENT DIMENSIONS

d _a min. 47 mm	Abutment diameter shaft
d _a max. 49 mm	Abutment diameter shaft
D _i max. 73 mm	Abutment diameter housing
r _a max. 1.1 mm	Fillet radius



CALCULATION DATA

C	19.9 kN	Basic dynamic load rating
C ₀	6.95 kN	Basic static load rating
P _u	0.355 kN	Fatigue load limit
	5 600 r/min	Limiting speed
α	1.5 °	Permissible angular misalignment
k _r	0.045	Calculation factor
e	0.22	Calculation factor
Y ₀	2.8	Calculation factor
Y ₁	2.9	Calculation factor
Y ₂	4.5	Calculation factor

MASS

	0.5 kg	Mass bearing
--	--------	--------------