



2216 EKTN9 Self-aligning ball bearings

- Popular item

Self-aligning ball bearings


Bearing data

[Tolerances](#),
Normal, JS7,
[Radial internal clearance](#),
table

Bearing interfaceS

[Seat tolerances for standard conditions](#),
[Tolerances and resultant fits](#)

Technical specification

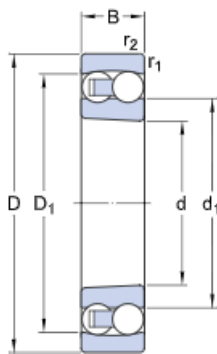


DIMENSIONS

d	80 mm	Bore diameter
D	140 mm	Outside diameter
B	33 mm	Width
d ₁	≈ 99 mm	Shoulder diameter inner ring
D ₁	≈ 125.2 mm	Shoulder diameter outer ring
r _{1,2}	min. 2 mm	Chamfer dimension
Tapered bore, taper 1:12		

ABUTMENT DIMENSIONS

D _ç	max. 129 mm	Abutment diameter housing
r _a	max. 2 mm	Fillet radius

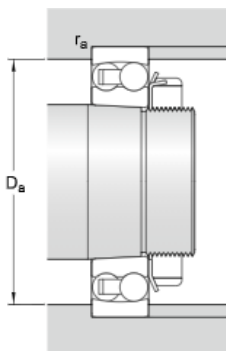

CALCULATION DATA

C	65 kN	Basic dynamic load rating
C ₀	25.5 kN	Basic static load rating
P _u	1.25 kN	Fatigue load limit
	8 500 r/min	Reference speed
	6 000 r/min	Limiting speed
α	2.5 °	Permissible angular misalignment
k _r	0.045	Calculation factor
e	0.22	Calculation factor
Y ₀	2.8	Calculation factor
Y ₁	2.9	Calculation factor
Y ₂	4.5	Calculation factor

MASS

1.9 kg	Mass bearing
--------	--------------