



3206 A-2RS1TN9/MT33

Angular contact ball bearings, double row

– SKF Explorer

Angular contact ball bearings, double row

Bearing data

[Tolerances,](#)

Normal, P6, P5,

[Internal clearance,](#)


table, drawing no

Bearing interfaces

[Seat tolerances for standard conditions,](#)

[Tolerances and resultant fit](#)

Technical specification

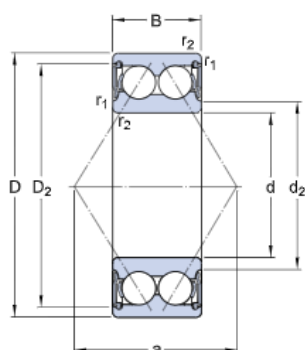


DIMENSIONS

d	30 mm	Bore diameter
D	62 mm	Outside diameter
B	23.8 mm	Width
d ₂	≈ 38.7 mm	Recess diameter inner ring shoulder
D ₂	≈ 55.15 mm	Recess diameter outer ring shoulder
r _{1,2}	min. 1 mm	Chamfer dimension inner ring
a	36 mm	Distance pressure point(s)

ABUTMENT DIMENSIONS

d _a	min. 35.6 mm	Abutment diameter shaft
d _a	max. 38.5 mm	Abutment diameter shaft
D _i	max. 56.4 mm	Abutment diameter housing
r _a	max. 1 mm	Fillet radius



CALCULATION DATA

C	30.5 kN	Basic dynamic load rating
C ₀	22 kN	Basic static load rating
P _u	0.93 kN	Fatigue load limit
	7 500 r/min	Limiting speed
k _r	0.06	Calculation factor
e	0.8	Calculation factor
X	0.63	Calculation factor
Y ₀	0.66	Calculation factor
Y ₁	0.78	Calculation factor
Y ₂	1.24	Calculation factor

MASS

	0.29 kg	Mass bearing
--	---------	--------------