



7304 BE-2RZP Angular contact ball bearings, single row

- Popular item

Angular contact ball bearings, single row

Bearing data

[Tolerances,](#)

Normal (metric), P6, P5, Normal (inch),

[Internal clearance,](#)

CA+CB+CC, G,

[Preload,](#)


GA+GB+GC

Bearing interfaces

[Seat tolerances for standard conditions,](#)

[Tolerances and resultant fit](#)

Technical specification




DIMENSIONS

d	20 mm	Bore diameter
D	52 mm	Outside diameter
B	15 mm	Width
d1	≈ 32.9 mm	Shoulder diameter inner ring (large side face)
d2	≈ 26.75 mm	Shoulder diameter inner ring (small side face)
D2	≈ 41.55 mm	Recess diameter outer ring (large side face)
D5	≈ 46.8 mm	Recess diameter outer ring (small side face)
a	22.8 mm	Distance pressure point
r _{1,2}	min. 1.1 mm	Chamfer dimension
r _{3,4}	min. 0.6 mm	Chamfer dimension outer ring small side face

ABUTMENT DIMENSIONS

d _e min.	27 mm	Abutment diameter shaft
d _e max.	30.5 mm	Abutment diameter shaft
D _i max.	45 mm	Abutment diameter housing

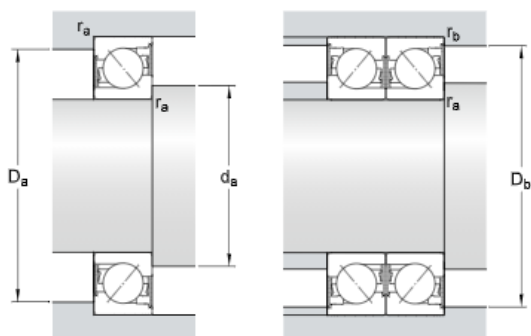
 D_l max. 47.8 mm

Abutment diameter housing

 r_a max. 1 mm

Fillet radius

 r_b max. 0.6 mm

Fillet radius

CALCULATION DATA

C	17.4 kN	Basic dynamic load rating
C_0	9.5 kN	Basic static load rating
P_u	0.4 kN	Fatigue load limit
	17 000 r/min	Reference speed
	13 000 r/min	Limiting speed
A	0.002	Calculation factor
k_r	0.1	Calculation factor
e	1.14	Calculation factor

SINGLE BEARING OR BEARING PAIR ARRANGED IN TANDEM

X	0.35	Calculation factor
Y_0	0.26	Calculation factor
Y_2	0.57	Calculation factor

BEARING PAIR ARRANGED BACK-TO-BACK OR FACE-TO-FACE

X	0.57	Calculation factor
Y_0	0.52	Calculation factor
Y_1	0.55	Calculation factor
Y_2	0.93	Calculation factor