

## The Timken Company 4500 Mt Pleasant St. NW N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: <u>CustomerCAD@timken.com</u> • Web site: <u>www.timken.com</u>

Part Number 6008-NR-C3, Deep Groove Ball Bearings (6000, 6200, 6300, 6400)

Timken's deep groove ball bearings deliver reliable performance in a wide range of applications and conditions. With super-finished raceways and controlled geometries, our premium design helps ensure consistent quality.



## <u>Specifications</u> | <u>Dimensions</u> | <u>Basic Load Ratings</u> | <u>Factors</u>

Specifications –			
	Clearance	C3	
	Bore Size d	40.000 mm	
	Features	Snap Ring	
	Bearing Type	Standard DGBB	
	Weight	0.190 Kg	

Dimensions		-
Outside Diameter D	68.000 mm	
utside Ring Width B	15.000 mm	




Radius Rs min	1.000 mm
Snap Ring Diameter D2 max	74.600 mm
Snap Ring Width f max	1.700 mm

Basic Load Ratings –					
	Cr - Dynamic Load Rating	16.8 kN			
	COr - Static Load Rating	11.5 kN			

Fac	tors		-
	Grease Reference Speed	10000 rpm	
	Oil Reference Speed	15000 rpm	



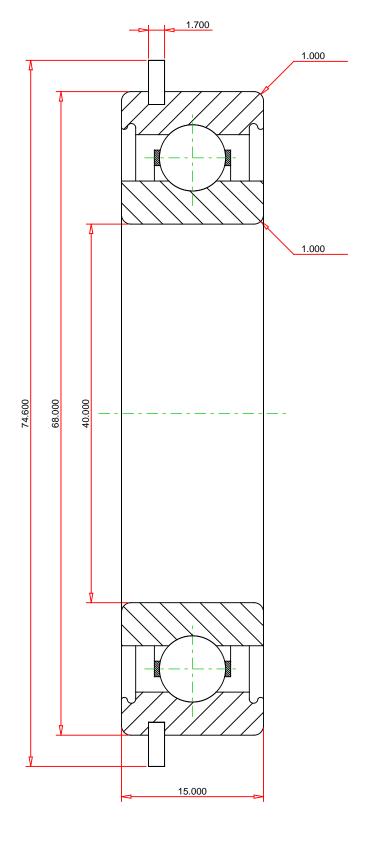

**METRIC UNITS** 

Weight 0.19 k

## THE TIMKEN COMPANY NORTH CANTON, OHIO USA

## 6008-NR-C3

Deep Groove Ball Bearings (6000, 6200, 6300, 6400)

Dynamic Load Rating
Static Load Rating

16800 N 11500 N

ut no

FOR DISCUSSION ONLY

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.