

## The Timken Company 4500 Mt Pleasant St. NW N. Canton, OH 44720 Phone: (234) 262-3000

E-Mail: <u>CustomerCAD@timken.com</u> • Web site: <u>www.timken.com</u>

Part Number 6022-2RZ, Deep Groove Ball Bearings (6000, 6200, 6300, 6400)

Timken's deep groove ball bearings deliver reliable performance in a wide range of applications and conditions. With super-finished raceways and controlled geometries, our premium design helps ensure consistent quality.



## <u>Specifications</u> | <u>Dimensions</u> | <u>Basic Load Ratings</u> | <u>Factors</u>

Specifications –		
	Clearance	C0 (Normal)
	Bore Size d	110.000 mm
	Features	Non-Contact Seals
	Bearing Type	Standard DGBB
	Weight	1.93 Kg
	VVCIBILE	1.70 Ng

Dimensions		- )
Outside Diameter D	170.000 mm	
utside Ring Width B	28.000 mm	




Radius Rs min	2.000 mm
---------------	----------

Cr - Dynamic Load Rating 82 kN  C0r - Static Load Rating 73 kN	Ва	sic Load Ratings			-
COr - Static Load Rating 73 kN		Cr - Dynamic Load Rating	82 kN		
		COr - Static Load Rating	73 kN		

Factors		-
Grease Reference Speed	4600 rpm	
Oil Reference Speed	6600 rpm	



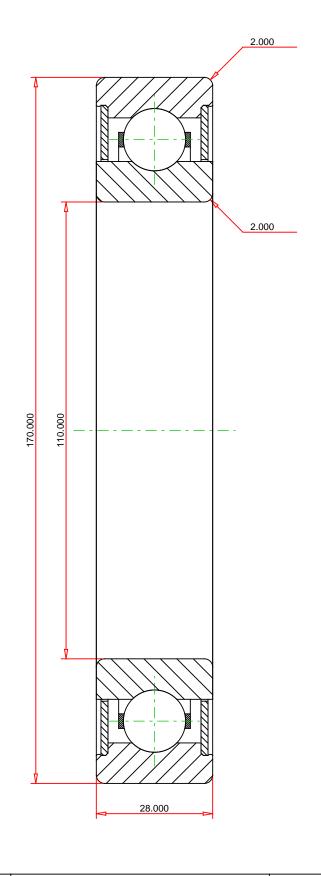

**METRIC UNITS** 

Weight 0.02 kg

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

6022-2RZ

Deep Groove Ball Bearings (6000, 6200, 6300, 6400)

Dynamic Load Rating Static Load Rating 4600 N 2000 N

no F

FOR DISCUSSION ONLY

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.