

The Timken Company 4500 Mt Pleasant St. NW N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: <u>CustomerCAD@timken.com</u> • Web site: <u>www.timken.com</u>

Part Number 6201-2RS-NR, Deep Groove Ball Bearings (6000, 6200, 6300, 6400)

Timken's deep groove ball bearings deliver reliable performance in a wide range of applications and conditions. With super-finished raceways and controlled geometries, our premium design helps ensure consistent quality.



<u>Specifications</u> | <u>Dimensions</u> | <u>Basic Load Ratings</u> | <u>Factors</u>

Specifications –					
	Clearance	C0 (Normal)			
	Bore Size d	12.000 mm			
	Features	Contact Seals With Snap Ring			
	Bearing Type	Standard DGBB			
	Weight	0.040 Kg			

Dimer	nsions		-
	Outside Diameter D	32.000 mm	
(T)	utside Ring Width B	10.000 mm	




Radius Rs min	0.600 mm
Snap Ring Diameter D2 max	36.700 mm
Snap Ring Width f max	1.120 mm

Basic Load Ratings –				
	Cr - Dynamic Load Rating	6.8 kN		
	COr - Static Load Rating	3 kN		

Fac	tors		-
	Grease Reference Speed	21000 rpm	
	Oil Reference Speed	30000 rpm	



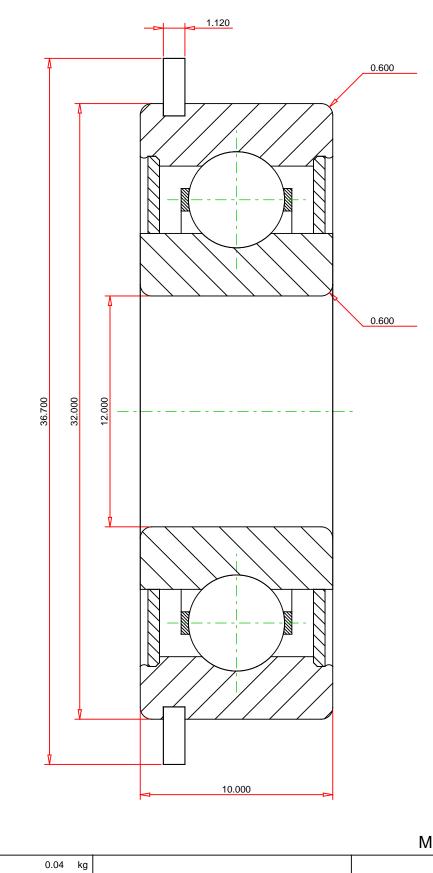

METRIC UNITS

Weight 0.04 kg

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

6201-2RS-NR

Deep Groove Ball Bearings (6000, 6200, 6300, 6400)

Dynamic Load Rating Static Load Rating 6800 N 3000 N

no F

FOR DISCUSSION ONLY

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.