

The Timken Company 4500 Mt Pleasant St. NW N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: <u>CustomerCAD@timken.com</u> • Web site: <u>www.timken.com</u>

Part Number 6216-Z-NR, Deep Groove Ball Bearings (6000, 6200, 6300, 6400)

Timken's deep groove ball bearings deliver reliable performance in a wide range of applications and conditions. With super-finished raceways and controlled geometries, our premium design helps ensure consistent quality.



<u>Specifications</u> | <u>Dimensions</u> | <u>Basic Load Ratings</u> | <u>Factors</u>

Specifications –					
	Clearance	C0 (Normal)			
	Bore Size d	80.000 mm			
	Features	One Shield With Snap Ring			
	Bearing Type	Standard DGBB			
	Weight	1.4 Kg			

Dimensions –					
Outside Diameter D	140.000 mm				
utside Ring Width B	26.000 mm				




Radius Rs min	2.000 mm
Snap Ring Diameter D2 max	149.700 mm
Snap Ring Width f max	2.820 mm

Basic Load Ratings –					
	Cr - Dynamic Load Rating	72.7 kN			
	COr - Static Load Rating	53 kN			

Fac	tors		-
	Grease Reference Speed	5200 rpm	
	Oil Reference Speed	7500 rpm	



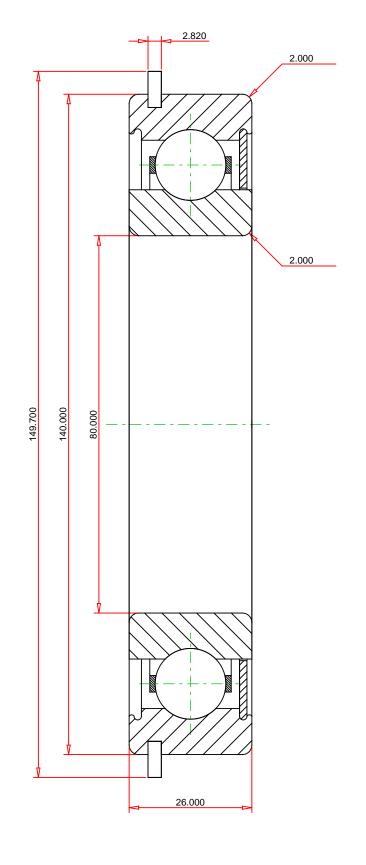

METRIC UNITS

Weight 1.4 kg

THE TIMKEN COMPANY NORTH CANTON, OHIO USA

6216-Z-NR

Deep Groove Ball Bearings (6000, 6200, 6300, 6400)

Dynamic Load Rating Static Load Rating 72700 53000

no

FOR DISCUSSION ONLY

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.