

The Timken Company 4500 Mt Pleasant St. NW N. Canton, OH 44720

Phone: (234) 262-3000
E-Mail: <u>CustomerCAD@timken.com</u> • Web site: <u>www.timken.com</u>

Part Number 6303-Z-NR, Deep Groove Ball Bearings (6000, 6200, 6300, 6400)

Timken's deep groove ball bearings deliver reliable performance in a wide range of applications and conditions. With super-finished raceways and controlled geometries, our premium design helps ensure consistent quality.



<u>Specifications</u> | <u>Dimensions</u> | <u>Basic Load Ratings</u> | <u>Factors</u>


Specifications –				
	Clearance	C0 (Normal)		
	Bore Size d	17.000 mm		
	Features	One Shield With Snap Ring		
	Bearing Type	Standard DGBB		
	Weight	0.120 Kg		

Dime	ensions		-
	Outside Diameter D	47.000 mm	
	utside Ring Width B	14.000 mm	

Radius Rs min	1.000 mm
Snap Ring Diameter D2 max	52.700 mm
Snap Ring Width f max	1.120 mm

Ba	sic Load Ratings	-
	Cr - Dynamic Load Rating	13.6 kN
	C0r - Static Load Rating	6.6 kN

Fac	ctors		-)
	Grease Reference Speed	15000 rpm	
	Oil Reference Speed	22000 rpm	

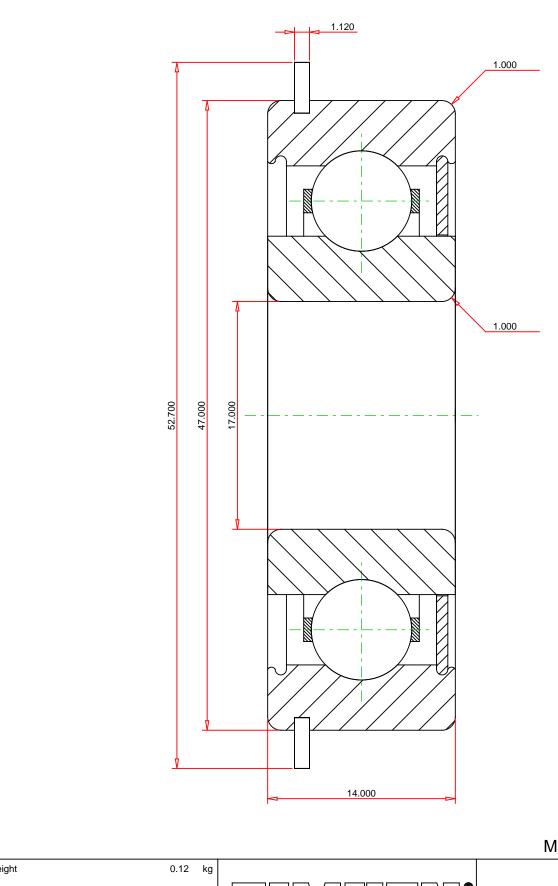

METRIC UNITS

Weight

THE TIMKEN COMPANY NORTH CANTON, OHIO USA

6303-Z-NR

Deep Groove Ball Bearings (6000, 6200, 6300, 6400)

Dynamic Load Rating Static Load Rating

13600 6600

Ν

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY