




## 1 - IDENTIFICATION CODE

<div>M S D / / 50 /</div>									
ISO 4401-03 size Modular version			Seals: omit for mineral oils V = viton for special fluids						
Direct operated sequence valve			Series No. (the overall and mounting dimensions remain unchanged from 50 to 59)						
Pressure adjustment range: 3 = 10 ÷ 70 bar 4 = 30 ÷ 140 bar 5 = 50 ÷ 280 bar			M = adjustment with SICBLOC knob (omit for adjustment with hexagonal head screw)						

## 2 - CHARACTERISTIC CURVES (values obtained with viscosity of 36 cSt at 50°C)

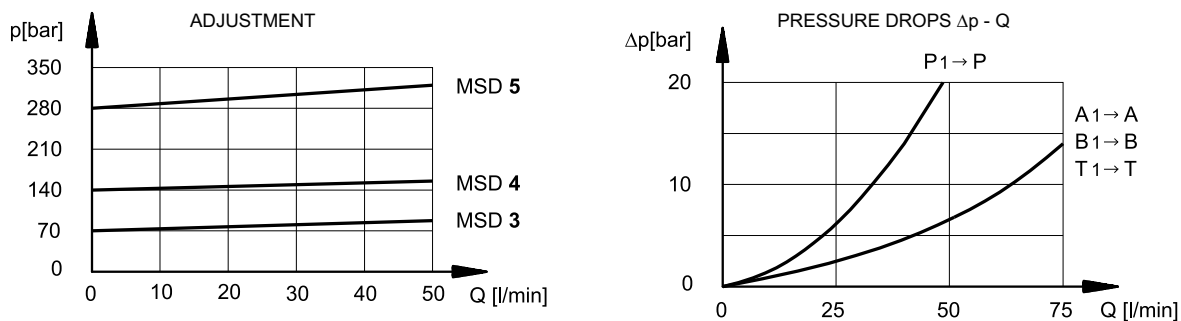

## 3 - HYDRAULIC FLUIDS

Use mineral oil-based hydraulic fluids HL or HM type, according to ISO 6743-4. For these fluids, use NBR seals. For fluids HFDR type (phosphate esters) use FPM seals (code V). For the use of other kinds of fluid such as HFA, HFB, HFC, please consult our technical department.

Using fluids at temperatures higher than 80 °C causes a faster degradation of the fluid and of the seals characteristics. The fluid must be preserved in its physical and chemical characteristics.

## 4 - OVERALL AND MOUNTING DIMENSIONS

